


LINKALED: LUTKLED10

FLEXIBLE TAPE LED LIGHTING SYSTEM - 10' ROLL

SHAPES

LUTKLED10

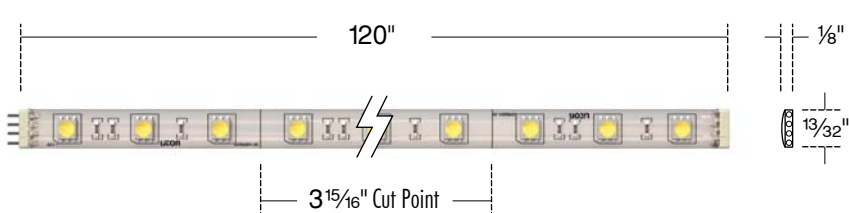

STRIP LIGHT
Flexible and modular LED tape lighting system. Highly durable 3M brand adhesive tape on back for easy installation.

POWER CONSUMPTION	20W
LUMENS	1000
CUTTABLE?	YES (every 4")
COLOR TEMPERATURE	-T27: 2,700K

SPECIFICATIONS

APPLICATIONS:

Accent lighting for coves, kick spaces, inside and under cabinets, recreation vehicles, wine racks and other linear applications.

DESCRIPTION:

A flexible and modular LED tape lighting system. High quality silicone covered LEDs populated onto a flexible metallic 3/8" wide by 1/8" deep tape-like product with a self adhesive back for easy installation. Excellent for small spaces that need a nice soft illumination.

MOUNTING:

Highly durable 3M brand adhesive tape on back side of LED strip.

LAMP LIFE

- 35,000 hours of life with 70% of initial lumens.

OPTIONAL LED COLORS

- Blue, Green, Amber, Red and RGB are special order.

LED LAMP DISTRIBUTION

- Standard 120-degree.

LISTING

- ETL Listed as a Class 2 LED system for dry locations. For wet locations, use silicone gel to encapsulate connectors.

FEATURES

- Flexible: Can go around very tight curves and corners.
- Operating Temp: -4°F - 122°F
- Modular: No soldering or flimsy connectors.
- Plug and Play.
- Protective Silicone Cover: prevents rust or chemical reactions with cleaners.
- 2 year warranty.
- Max Ambient Temp: 95°F (30°C)
- 60W max. input per run.

ORDERING

Example: LUTKLED10-27

CATALOG#	COLOR TEMPERATURE	
LUTKLED10	-T27:	2,700K


ACCESSORIES

INTER-CONNECTORS / POWER FEEDS - 60W MAX.

	LULEDB-T-4		LUTKLED-DM50
	<p>3-Way Inter Connector 3-Way flexible inter-connector connects up to 3 sections of LinkaLED Bar or LinkaLED Tape connects 1 power feed and up to two (2) -12V LinkaLED products. 60W max. input.</p>		<p>4-Step Inline Dimmer Switch 4-stage Touch Dimmer for 12V LinkaLED tape. Note: For runs between 8' to 15'. (20W - 37.5W)</p>
	<p>1-Into-3 Power Connector 1 into 3 flexible power feed connects one power feed to 3 LinkaLED Pucks or up to 3 sections of LinkaLED Bar or LinkaLED Tape. 60W max.</p>		<p>End Feed Connector Connects LinkaLED product to driver. LinkaLED 4-Pin connector at one end, stripped wires at the other. 60W max. input.</p>
	<p>Wet Location Gel Wet location gel for water-resistant connections between LinkaLED tape sections. Must be applied at all connection points.</p>		<p>Power Inter-Connect 4" or 16" Inter-connector with LinkaLED 4-Pin connector at both ends. For linking 2 LinkaLED products. 60W max. input.</p>

INSTALLATION

INSTRUCTIONS FOR LINKALED TAPE

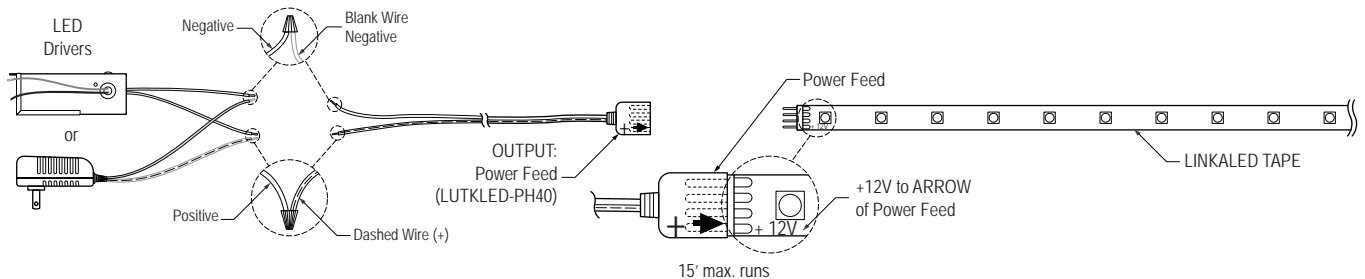

POWER SUPPLIES

AC PLUG-IN / HARDWIRE DRIVERS

CATALOG#	WATTAGE	VOLTAGE	DIMMING	POWER METHOD	LISTING	DIMENSIONS
LUTKLED-36V12	36W	120V	4-Step w/DM50 Module	AC Plug-in	UL	3.82" x 2.16" x 1.54"
LD529V012-10	110W	120V	None	Hardwire ^{1,3}	UR	6.50" x 2.62" x 2.25"
LD533V012-60	60W	90V-265V	None	Hardwire ^{1,3}	UL	3.75" x 1.61" x 1.00"
LD533V012-60-DLV-JB	60W	120V	Electronic Low Voltage	Hardwire ^{1,3}	ETL	8.19" x 2.06" x 0.75"

¹ add -PI for US Wall Plug

² not to be used for non-dimming location

³ requires LUTKLED-PH40

NOTE: All drivers are rated for dry locations. Installer must supply NEMA box for damp and wet locations.