


LX100 - TRANSPARENT SURFACE EXIT SIGN W/ BATTERY EXIT SIGNS

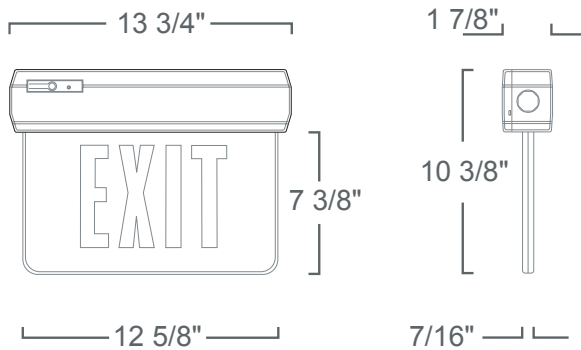

SPECIFICATION

120V

FEATURES

- Available in green/red letters. Example: LX100SG (green) ; LX100SR (red).
- LED lamp life of 25+ years consumes 1.2W-1.5W single face.
- Universal mounting canopy for end, top, or back mount installations. Consult factory.
- Injection molded acrylic panels.
- Chevron directional indicators.
- Maintenance free Nickel Cadmium battery.
- Completely self-contained.
- Dual Voltage AC 120V/277V.
- AC only model available in 1-circuit or 2-circuit configurations.
- UL/ETL listed.

OPERATION

Unit is constantly illuminated by normal AC power.

WARRANTY

The fixture carries a warranty for a period of one year to be free from defective material and workmanship.

Fixture Finish: Only available in Black.

Faces: Only available in Single.

Letters: Only available in Green.

Accessories: Lamp included.

Label: UL Listed

COMPATIBILITY



LPO

PENDANT ASSEMBLY
KIT

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LX100BG

| LX100 | FIXTURE FINISH | FACES | LETTERS |
|-------|----------------|---------------|----------|
| LX100 | B :Black | Blank :Single | G :Green |

ID#: 665