



SL630 : 9" LOUVER FACE LED STEP LIGHT

LED PATHWAY/STEP LIGHTING (11W)

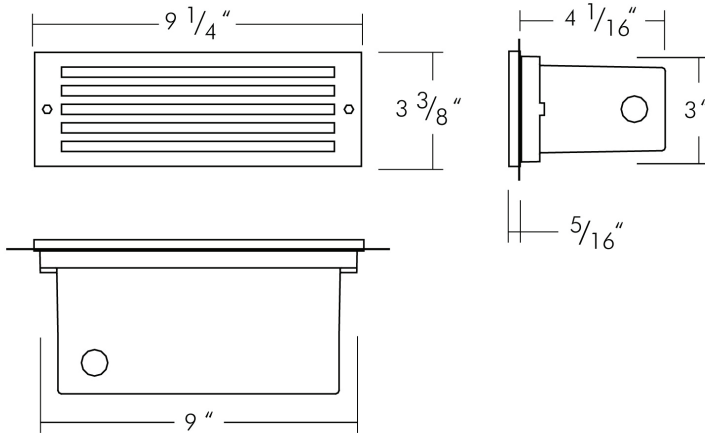

- High Quality Die-Cast Construction
- High 80 CRI
- 120V/277V Option
- 5-Year Warranty
- 32W CFL Equivalent

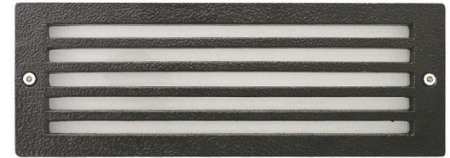

ORDERING : SL630BUE-T30

SL630
Fixture Finish Options Color Temperature

Finish	Options	Color Temperature
Black B	120V Blank	3000K -T30¹
White W	120V/277V UE	3500K -T35²
Silver N¹	120V/277V UE-DUN	4000K -T40
Bronze BZ¹	2-Wire, ELV & 0-10V Dimming	5000K -T50²
		Color Changing -RGBW

¹ Extended Lead Time may apply.
² Special Order. Minimum amount required and extended lead times may apply.

SPECIFICATION

Application

Recessed Wall Luminaire designed for commercial, architectural, and residential installation. Designed to conform to the architectural requirements for low mounting heights for the illumination of steps, stairways, walkways, aisles, ramps and other indoor and outdoor applications. Can be mounted vertically.

Housing

Constructed of high grade die cast aluminum with an integral wiring compartment and silicone gasket. Four (4) threaded holes (1/2-14 NPSM) and mounting tabs provided.


Faceplate

Rectangular open one-piece die cast aluminum faceplate and semi-translucent UV stabilized polycarbonate opal lens. Faceplate is installed by two (2) captive, tamper resistant, stainless steel screws.

Electrical

120V/277V Modular LED Engine (Field Replaceable) Consult Factory for dimming and sensor options.

Finish

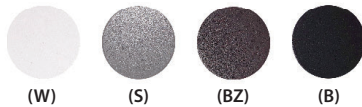

Available in Black, White, Silver and Bronze.


Listing

ETL /cETL Listed, suitable for wet location and for all types of constructions including mounting within 1.2 m (4 feet) of the ground, use in poured concrete, Type IC, Type Non-IC. ADA compliant. Assembled in USA. (IP65).

Warranty

Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship.

Color Temperature



Available in 3000K, 3500K, 4000K, 5000K and Color Changing.

LED Details

1000 lamp lumens
240 delivered lumens
Color Rendering Index (CRI): 80
Lamp Equivalents: 100W A19 32W CFL