
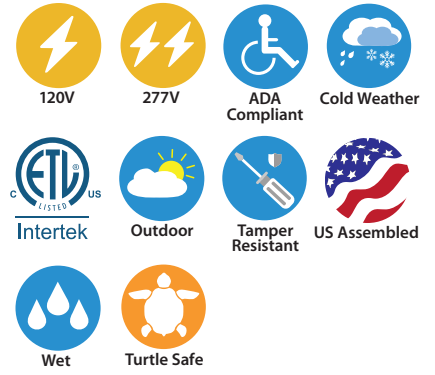
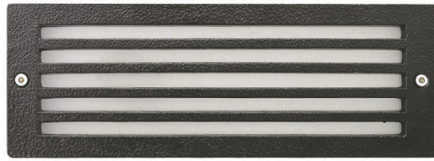


SL630 : 9" LOUVER FACE LED STEP LIGHT

AMBER (TURTLE SAFE) LED PATHWAY/STEP LIGHTING (11W)

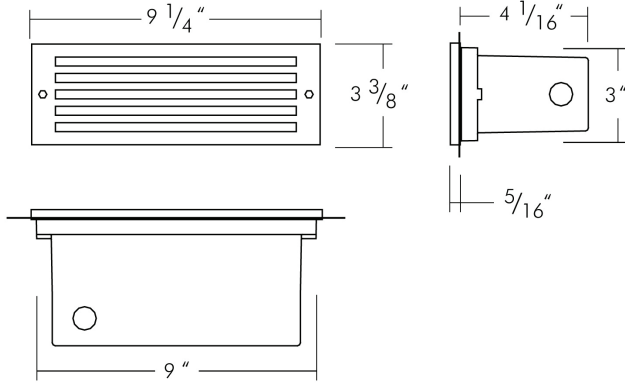

- (IP65) Suitable for wet locations
- 590nm Amber (Turtle Safe)
- 120V/277V Option
- 5-Year Warranty

ORDERING : SL630BUE-TAM

SL630
Fixture Finish Options Color Temperature

Finish	Options	Color Temperature
Black B	120V Blank	590nm Amber -TAM
White W	120V/277V UE	
Silver N¹	120V/277V UE-DUN	
Bronze BZ¹	0-10V Dimming	

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

SPECIFICATION

Application

Recessed Wall Luminaire designed for commercial, architectural, and residential installation. Designed to conform to the architectural requirements for low mounting heights for the illumination of steps, stairways, walkways, aisles, ramps and other indoor and outdoor applications. Can be mounted vertically.

Housing

Constructed of high grade die cast aluminum with an integral wiring compartment and silicone gasket. Four (4) threaded holes (1/2-14 NPSM) and mounting tabs provided.

Faceplate

Rectangular open one-piece die cast aluminum faceplate and semi-translucent UV stabilized polycarbonate opal lens. Faceplate is installed by two (2) captive, tamper resistant, stainless steel screws.


Electrical

120V/277V Modular LED Engine (Field Replaceable) Consult Factory for dimming and sensor options.

Minimum Operating Temperature:
Standard: -30°C/-22°F

Finish

Available in Black, White, Silver and Bronze.



Listing

ETL /cETL Listed, suitable for wet location and for all types of constructions including mounting within 1.2 m (4 feet) of the ground, use in poured concrete, Type IC, Type Non-IC. ADA compliant and suitable for installation within 4ft of the ground. Assembled in USA. (IP65).

Warranty

Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship.

Color Temperature

590nm Amber.

