


AGQ2340 : AG2·SERIES

4" SQUARE SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 1500LM (10W-15W)

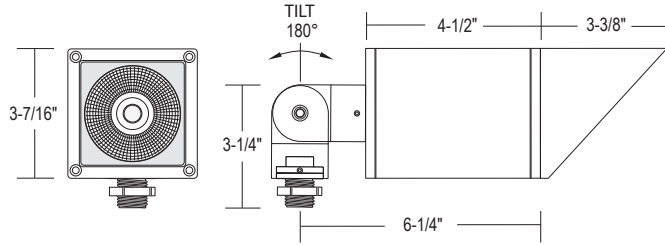

AGQ2340 Shown with
Glare Shield Option (-SH)



- Design consistency with WD/DL/BL2 Series
- Variety of mounting methods
- 120-277V/347V Input options
- Available with multiple CCTs and dimming options
- Wireless and wired RGB+W options available (12W)
- Glare shield for eye comfort
- Weep holes for water drainage

ORDERING : AGQ2340W-L15-B10UE-D10-T27-JB-CRD/AG2-T-W

[Click for Full Specification Details](#)

AGQ2340

Fixture	Finish	Lumen	Beam Spread	Control	LED	Mounting	Options	Accessories	Color Finish
Finish		Beam Spread		LED		Accessories			
White	AGQ2340W	Wide Flood	Blank	4000K (90 CRI)	Blank	GROUND Installation			
Black	AGQ2340B	8° Mini Spot	-B08^{1,9}	2700K (90 CRI)	-T27	None Blank			
Bronze	AGQ2340BZ	Narrow Spot	-B10	2700K (97 CRI)	-T27-C97	Ground Spike /AG2-SPK			
Silver	AGQ2340S¹	Spot	-B20	3000K (90 CRI)	-T30	Ground Spike, AC /AG2-SPK-AC			
Light Silver	AGQ2340LS¹	Flood	-B45	3000K (97 CRI)	-T30-C97	WALL/CEILING/TREE Installation⁵			
Dark Grey	AGQ2340DG¹	Asymmetric (30° x 60°)	-B3060¹	3500K (90 CRI)	-T35	T-Connector /AG2-T			
Metallic Gold	AGQ2340MG¹			5000K (80 CRI)	-T50	L-Connector /AG2-L			
Metallic Black	AGQ2340MB¹			RGB+W Control (24VDC)	-RGBWV24^{2,8}	Stem Coupler /AG2-CPL			
Lumen		Control		Mounting		Options^{3,4}			
1000lm (10W)	Blank	Non-Dimming (120V)	Blank	590nm Amber (Turtle Safe)	-TAM⁸	Direct	Blank	6" Stem /AG2-STM06	
1500lm (15W)	-L15	UniDim™ (120V/277V)	UE-DUN	Mounting		Flat Plate, Surface Mount	-PL	12" Stem /AG2-STM12	
		0-10V (120V/277V)	UE-D10	None	Blank	Junction Box	-JB	18" Stem /AG2-STM18	
		TRIAC Dimming (120V)	-DIN	36" Jacketed-Cable	-CRD	24" Stem /AG2-STM24			
		0-10V 1% (120V/277V)	UE-D10P1	36" Cable and Shield	-CRD-SH	36" Stem /AG2-STM36			
		Casambi Wireless Dimming (120V/277V)	-DCSM⁵	Shield	-SH	Tree Strap /AG2-TREE			
		BubblyNet Wireless System (120V/277V)	-DBNT⁶	Hex-Cell Louver	-LVR	ROUND POLE MOUNT Installation			
		SimplySnap Wireless System (120V/277V)	-DSYN⁷	Surge Protector	-SRG	Tenon Reducer Hub /AG2-TRH-1/2			
				Frosted Lens	-FR	EMERGENCY OPTIONS Installation			
				Marine Grade Finish	-MGD¹	None Blank			
						Face Mount EM Back Pack /AG2-EMB			
						Empty Back Pack /AG2-EMB BLANK⁷			
						Color Finish⁶			
						White -W			
						Black -B			
						Bronze -BZ			

¹ Special Order. Minimum order, extended lead time may apply. Consult factory.
² Remote power supplies and control gear required. Available with wireless Bluetooth or DMX control. Consult factory for details.
³ Cable (-CRD) not available with stem and mounting.
⁴ Custom cable lengths available. Consult Factory.
⁵ Special Order. Must be ordered with -EMB-FC.
⁶ Must be ordered with (-JB).
⁷ Special Order. Must be ordered with -EMB-BLANK.
⁸ (-TAM) 590nm Amber (Turtle Safe) and (-RGBWV24) RGB+W control is only available with Wide Flood (Blank) Beam Spread.
⁹ (-B08) Mini Spot not available with LED option: (-T50) 5000K, 80 CRI.

COMPATABILITY

SUN-RMT
Remote Unisense™

