


AG2360 : AG2·SERIES

6" ROUND SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 2600LM (10W-30W)

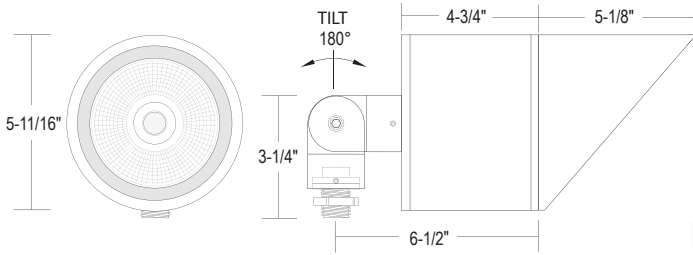

AG2360 Shown with
Glare Shield Option (-SH)



- Design consistency with WD/DL/BL2 Series
- Variety of mounting methods
- 120-277V/347V Input options
- Optional field adjustable Variable Beams, CCTs, and dimming options
- Wireless and wired RGBW options available (12W)
- Glare shield for eye comfort
- Weep holes for water drainage

ORDERING : AG2360W-L15-B10UE-DUN-T27-JB-CRD/AG2-T-W

[Click for Full Specification Details](#)

AG2360

Fixture	Finish	Lumen	Beam Spread	Dimming	LED	Mounting	Options	Accessories	Color Finish
Finish		Beam Spread		LED		Accessories			
White	AG2360W	Wide Flood	Blank	4000K (90 CRI)	Blank	GROUND Installation			
Black	AG2360B	Narrow Spot	-B10	2700K (90 CRI)	-T27	None Blank			
Bronze	AG2360BZ	Spot	-B20	2700K (97 CRI)	-T27-C97	Ground Spike /AG2-SPK			
Silver	AG2360S¹	Flood	-B45	3000K (90 CRI)	-T30	Ground Spike, AC /AG2-SPK-AC			
Light Silver	AG2360LS¹	Asymmetric (30° x 60°)	-B3060¹	3000K (97 CRI)	-T30-C97	WALL/CEILING/TREE Installation⁵			
Dark Grey	AG2360DG¹	Variable Beam (25° - 50°)	-BVR	3500K (90 CRI)	-T35	T-Connector /AG2-T			
Metallic Gold	AG2360MG¹			5000K (80 CRI)	-T50	L-Connector /AG2-L			
Metallic Black	AG2360MB¹			RGB+W Control (24VDC)	-RGBWV24^{1,2}	Stem Coupler /AG2-CPL			
				590nm Amber (Turtle Safe)	-TAM⁹	6" Stem /AG2-STM06			
						12" Stem /AG2-STM12			
						18" Stem /AG2-STM18			
						24" Stem /AG2-STM24			
						36" Stem /AG2-STM36			
						ROUND POLE MOUNT Installation			
						Tenon Reducer Hub /AG2-TRH-1/2			
						EMERGENCY OPTIONS Installation			
						None Blank			
						Face Mount EM /AG2-EMB			
						Back Pack			
						Empty Back Pack /AG2-EMB BLANK⁷			
						Color Finish⁶			
						White -W			
						Black -B			
						Bronze -BZ			
						Options^{3,4}			
						None Blank			
						36" Jacketed-Cable -CRD			
						36" Cable and Shield -CRD-SH			
						Shield -SH			
						Hex-Cell Louver -LVR			
						Photocell Sensor -SDL			
						Surge Protector -SRG			
						Frosted Lens -FR			

¹ Special Order. Minimum order, extended lead time may apply. Consult factory.
² Remote power supplies and control gear required. Available with wireless bluetooth or DMX control. Consult factory for details.
³ Cable (-CRD) not available with stem and mounting.
⁴ Custom cable lengths available. Consult Factory.
⁵ Custom stem lengths available. Consult Factory.
⁶ Color finishes of accessories do not apply for AG2-SPK or AG2-SPK-AC.
⁷ Blank EM enclosure available for non-EM units to provide a seamless design.
⁸ (-347-D10) not available with 1000lm, 10W (Blank).
⁹ (-TAM) 590nm Amber (Turtle Safe) only available with Wide Flood (Blank) Beam Spread.

2024.04.12