


AG2360 : AG2·SERIES

6" ROUND SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 2600LM (10W-30W)

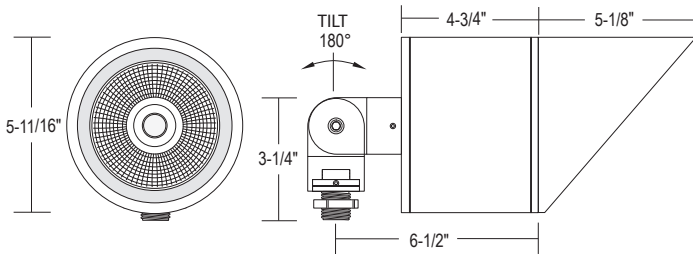

AG2360 Shown with
Glare Shield Option (-SH)



- Design consistency with WD/DL/BL2 Series
- Variety of mounting methods
- 120-277V/347V Input options
- Available with multiple CCTs and dimming options
- Wireless and wired RGBW options available (12W)
- Glare shield for eye comfort
- Weep holes for water drainage

ORDERING : AG2360W-L15-B10UE-DUN-T27-JB-CRD/AG2-T-W

[Click for Full Specification Details](#)

AG2360

Fixture	Finish	Lumen	Beam Spread	Control	LED	Mounting	Options	Accessories	Color Finish
Finish		Beam Spread		LED		Accessories			
White	AG2360W	Wide Flood	Blank	4000K (90 CRI)	Blank	GROUND Installation			
Black	AG2360B	Narrow Spot	-B10	2700K (90 CRI)	-T27	None Blank			
Bronze	AG2360BZ	Spot	-B20	2700K (97 CRI)	-T27-C97	Ground Spike /AG2-SPK			
Silver	AG2360S	Flood	-B45	3000K (90 CRI)	-T30	Ground Spike, AC /AG2-SPK-AC			
Light Silver	AG2360LS¹⁰	Asymmetric (30° x 60°)	-B3060¹	3000K (97 CRI)	-T30-C97	WALL/CEILING/TREE Installation⁵			
Dark Grey	AG2360DG¹⁰	Control		3500K (90 CRI)	-T35	T-Connector /AG2-T			
Metallic Gold	AG2360MG¹⁰	Non-Dimming (120V)	Blank	5000K (80 CRI)	-T50	L-Connector /AG2-L			
Metallic Black	AG2360MB¹⁰	UniDim™ (120V/277V)	UE-DUN	RGB+W Control (24VDC)	-RGBWV24²	Stem Coupler /AG2-CPL			
Lumen		0-10V (120V/277V)	UE-D10	590nm Amber (Turtle Safe)	-TAM-LVR⁹	6" Stem /AG2-STM06			
1000lm (10W)	Blank	0-10V 1% (120V/277V)	UE-D10P1	Mounting		12" Stem /AG2-STM12			
1500lm (15W)	-L15	Casambi Wireless Dimming (120V/277V)	-DCSM¹	Direct	Blank	18" Stem /AG2-STM18			
2200lm (22W)	-L20	BubblyNet Wireless System (120V/277V)	-DBNT¹	Flat Plate, Surface Mount	-PL	24" Stem /AG2-STM24			
2600lm (30W)	-L26	SimplySnap Wireless System (120V/277V)	-DSYN¹¹	Junction Box	-JB	36" Stem /AG2-STM36			
				Options^{3,4}		ROUND POLE MOUNT Installation			
				None	Blank	Tenon Reducer Hub /AG2-TRH-1/2			
				36" Jacketed-Cable	-CRD	EMERGENCY OPTIONS Installation			
				36" Cable and Shield	-CRD-SH	None Blank			
				Shield	-SH	Face Mount EM /AG2-EMB			
				Hex-Cell Louver	-LVR	Back Pack			
				Photocell Sensor	-SDL	Empty Back Pack /AG2-EMB BLANK⁷			
				Surge Protector	-SRG	Color Finish⁶			
				Frosted Lens	-FR	White -W			
				Marine Grade Finish	-MGD¹	Black -B			
						Bronze -BZ			

¹ Special Order. Minimum order, extended lead times may apply. Consult Factory.
² Remote power supplies and control gear required. Available with wireless bluetooth or DMX control. Consult factory for details.
³ Cable (-CRD) not available with stem and mounting.
⁴ Custom cable lengths available. Consult Factory.
⁵ Custom stem lengths available. Consult Factory.
⁶ Color finishes of accessories do not apply for AG2-SPK or AG2-SPK-AC.
⁷ Blank EM enclosure available for non -EM units to provide a seamless design.
⁸ (-347-D10) not available with 1000lm, 10W (Blank).
⁹ (-TAM-LVR) 590nm Amber (Turtle Safe) only available with Wide Flood (Blank) Beam Spread.
¹⁰ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
¹¹ Special Order. Must be ordered with -EMB-BLANK.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

COMPATABILITY



2026.01.15