


DL360 : 6" ROUND

CEILING DOWNLIGHT (IP65) AMBER (TURTLE SAFE) 250LM (22W)

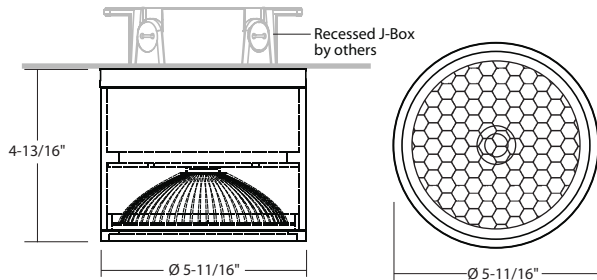

- Wildlife Lighting Approved
- Chip-On-Board light engine
- Energy efficient, low glare LED Chip-On-Board light engine
- True Amber Narrow Wavelength 590nm LED
- Emergency back up available
- Integral Surface J-Box Option
- 5-Year Limited Warranty

ORDERING : DL360B-UE-DUN-TAM-LVR-EMAC-JB

DL360

Fixture	Finish	Dimming	LED	Emergency Options	Options
---------	--------	---------	-----	-------------------	---------

Finish

White	(RAL 9003)	W
Silver	(RAL 7037)	S
Basic Bronze	(RAL 8019)	BZ
Black	(RAL 9005)	B
Light Silver	(RAL 7036)	LS ²
Dark Grey	(RAL 7015)	DG ²
Metallic Gold	(RAL 1001)	MG ²
Metallic Black	(RAL 7021)	MB ²

Dimming

Non-Dimming	Blank
UniDim™ (120V/277V)	UE-DUN
0-10V 1% Dimming (120V)	-D10P1

LED

Amber - Limited Wavelength - 590nm	-TAM-LVR
Emergency Options	
None	Blank
Remote location Emergency System	-EMAC
Emergency in Canopy for Surface Mounted Fixture	-EMA ^{5,7}

Options

None	Blank
Photocell Sensor	-SDL
Integral Junction Box 1-Outlet	-JB
Surge Protector	-SRG
Cold Weather	-CW ^{3,7}
Glare Shield	-SH



LINK

² Special Order. Minimum order, extended lead time may apply. Consult factory. (Finish options 50 piece minimum. 10-12 week lead time).

³ Starting temperature -30°C/-22°F; see pg. 6.

⁵ Standard option only available for Black (B), and White (W) finish. For alternate finishes; contact factory for pricing. Extended lead time may apply.

⁷ (-EMA) is not compatible with (-CW) option.

(Click for more Information)



View Full Detailed Specification Sheet