


DLQ360 : 6" SQUARE

CEILING DOWNLIGHT (IP65) 1000LM-2600LM (10W-30W)



- Energy efficient, low glare LED Chip- On-Board light engine
- Emergency back up available
- 5-Year Limited Warranty
- Exclusive Wall Wash Optics
- Integral J-Box Option

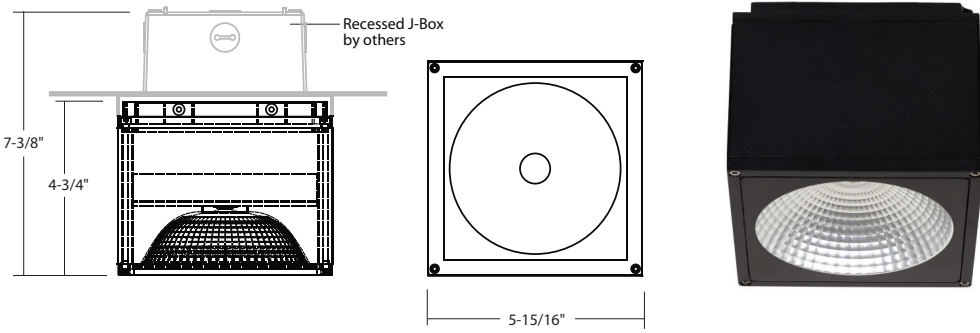

ORDERING : DLQ360W-L15-B10-UE-DUN-EMAC-T30-FR

DLQ360

| Fixture | Finish | Lumen | Optics | Dimming | Emergency Options | LED | Options |
|---|--------|--------------|---|----------------------------------|----------------------------|-----------------------|-----------------------------|
| Finish | | | Optics | Dimming | | LED | |
| White (RAL 9003) W | | | <i>Standard Beams</i> | Non-Dimming (120V) | Blank | 4000K (90 CRI) | Blank |
| Silver (RAL 7037) S | | | Wide Flood Blank | ELV and Triac (120V) | -DIN | 2700K (90 CRI) | -T27 |
| Basic Bronze (RAL 8019) BZ | | | Narrow Spot -B10 | 0-10V (120V/277V) | UE-D10 | 2700K (97 CRI) | -T27-C97² |
| Black (RAL 9005) B | | | Spot -B20 | UniDim™ (120V/277V) | UE-DUN | 3000K (90 CRI) | -T30 |
| Light Silver (RAL 7036) LS² | | | Flood -B45 | 0-10V 1% Dimming (120V/277V) | UE-D10P1 | 3000K (97 CRI) | -T30-C97² |
| Dark Grey (RAL 7015) DG² | | | <i>CleanBeam™ Option</i> | 347V 0-10V Dimming | 347-D10⁵ | 3500K (90 CRI) | -T35 |
| Metallic Gold (RAL 1001) MG² | | | Pencil Beam -B02 | Emergency Options | | 5000K (80 CRI) | -T50 |
| Metallic Black (RAL 7021) MB² | | | <i>Specialty Beams</i> | None | Blank | RGB+W Control (24VDC) | -RGBWW24⁴ |
| | | | Wall Wash -WW | Remote Location Emergency System | -EMAC | Options | |
| Lumen¹ | | | Asymmetric (110° x 40°) -B0160² | | | None | Blank |
| 1000lm (10W) | | Blank | | | | Frosted Lens | -FR |
| 1500lm (15W) | | -L15 | | | | Integral Junction Box | -JB |
| 2200lm (22W) | | -L20 | | | | Hex-Cell Louver | -LVR |
| 2600lm (30W) | | -L26 | | | | Photocell Sensor | -SDL² |
| | | | | | | Surge Protector | -SRG |

² Special Order. Minimum order, extended lead time may apply. Consult factory. (Finish options 50 piece minimum. 10-12 week lead time).
⁴ Remote Power Supplies and Control Gear Required, Available with Wireless Bluetooth or DMX Control. Consult Factory for Details.
⁵ Not compatible with 1000lm selection; use with 1500lm and above.

(Click for more Information)

[View Full Detailed Specification Sheet](#)