
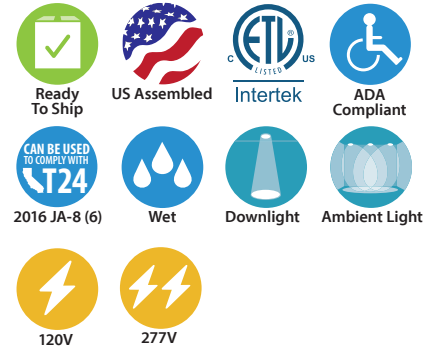


## LCMPD5R : 5" LUMENPAD ROUND

LED DOWNLIGHT SURFACE MOUNT 1000LM (11W)

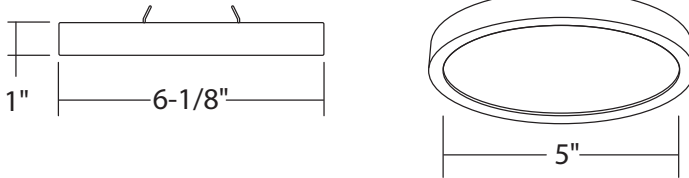

- Easily mounts to standard octagonal J-Box
- Super Slim 1" thick with die-cast aluminum frame
- No-glare side lit illumination
- Suitable for temperature down to -4°F/-20°C
- WET LOCATION – For covered ceiling mount only
- 3-Year Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant

### ORDERING : LCMPD5RW-TS30

[Click for Full Specification Details](#)

#### LCMPD5R

Fixture	Finish	Control	Color Temperature	Material
<b>Finish<sup>2</sup></b>	<b>Control<sup>4</sup></b>	<b>Color Temperature</b>	<b>Material</b>	
White <b>W</b>	TRIAC/ELV Dimming (120V)	2700K (90 CRI) <b>-TS27</b>	Die-Cast Aluminum <b>Blank</b>	
Black <b>B</b>	0-10V Dimming (120V/277V) <b>UE-D10<sup>5,6</sup></b>	3000K (90 CRI) <b>-TS30</b>	Non-Conductive <b>-PC<sup>1</sup></b>	
Silver <b>S</b>	Athena Wireless Node (120V) <b>-AWN<sup>8</sup></b>	3500K (90 CRI) <b>-TS35</b>	Polycarbonate	
Bronze <b>BZ</b>	Casambi Wireless Dimming (120V/277V) <b>-DCSM<sup>8</sup></b>	4000K (90 CRI) <b>-TS40</b>		
Matt Gold <b>G<sup>7</sup></b>	BubblyNet Wireless System (120V/277V) <b>-DBNT<sup>8</sup></b>	5000K (90 CRI) <b>-TS50</b>		
		ColorSelect 2700K/3000K/3500K/4000K/5000K (90 CRI) <b>-TS2750</b>		

<sup>1</sup> Special Order for Non-Conductive Polycarbonate (-PC). (-PC) option is US Assembled.  
<sup>2</sup> Field paintable ring options available. Consult factory.  
<sup>3</sup> California Title 24/JA8 compliant with (Blank) TRIAC/ELV dimming (120V) only.  
<sup>4</sup> Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.  
<sup>5</sup> Remote Emergency Battery Back Up Option only available for (UE-D10).  
<sup>7</sup> Special Order. Extended lead time.  
<sup>8</sup> Special Order. Must be ordered with LCMPD7-EMA-BLANK.