


# 10" SURFACE WALL LUMINAIRES 600 LM -1,500 LM

## 10" ROUND & SQUARE | ARCHITECTURAL WALL DIFFUSED LIGHT

### Benefits

- Impact Resistant Diffusing Lens
- Tamper Proof Hardware
- 80+CRI Light Quality
- ADA Compliant for Mounting within 4 feet of the ground
- IP65 RATED
- Available in Black, White, Silver & Architectural Bronze
- Cold Weather Operation (-40°F)
- Universal Dimming option dims with ELV, 2-Wire 0-10V Dimming Systems
- Glare-Free Soft Diffused Illumination

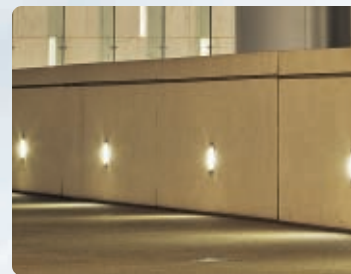

### Application

Surface Wall Sconce Luminaires are ideal for indoor or outdoor applications in residential, commercial, or architectural installations that requires the fixture to integrate into the design of the structure. The Wall Sconce can be used to direct and guide as well as supply lighting for security.

### Housing

Constructed of a one piece high grade die cast aluminum with a powder coat finish. Includes an integral wiring compartment and silicone gasket. Includes (1) power entry hole (1/2-14 NPSM)

### Faceplate

Round open one-piece high grade die cast aluminum with a high corrosion-resistant powder coat finish and semi-translucent UV stabilized polycarbonate opal lens for soft diffused glare-free illumination. Faceplate is secured to housing by four (4) captive, tamper resistant, stainless steel screws.

### Emergency Options

Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch, plate cover and junction box included.

### Lumen Maintenance

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results. See ordering guide for delivered lumens.

### Dimming

0-10V dimming option (-D10) works with most 5-Wire 0-10V dimmers. Factory qualified for use with Leviton IP710-DLX and Lutron NTFTV-WH.

### Electrical


Through wiring, a maximum of four (4) No. 12 AWG conductors (plus ground wire).

### Listing

UL / ETL Listed, suitable for wet locations and for all types of construction including poured concrete. ADA compliant and suitable for installation within 4 feet of ground.


### Warranty

Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship.

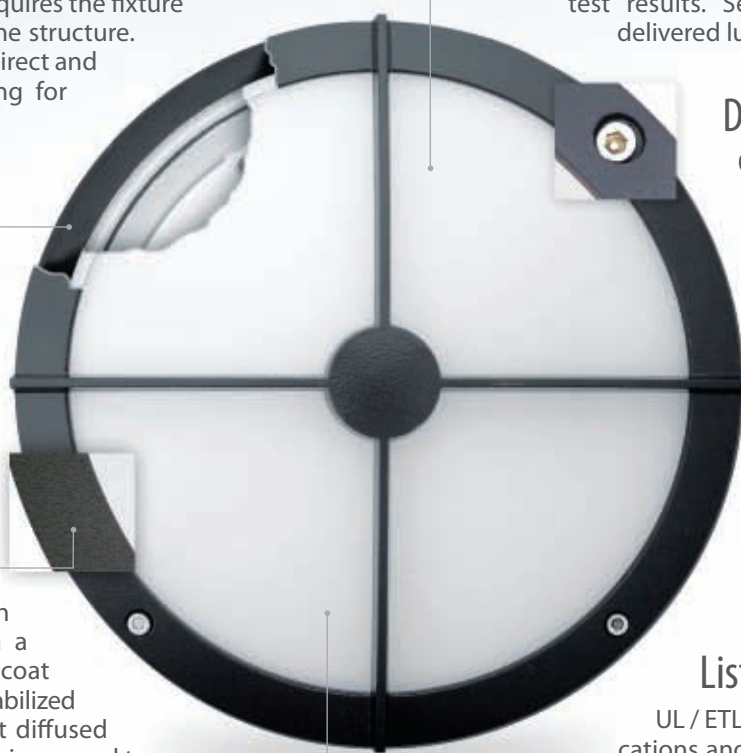

# 10" SURFACE WALL LUMINAIRES 600 LM -1,500 LM

## 10" ROUND & SQUARE | ARCHITECTURAL WALL DIFFUSED LIGHT

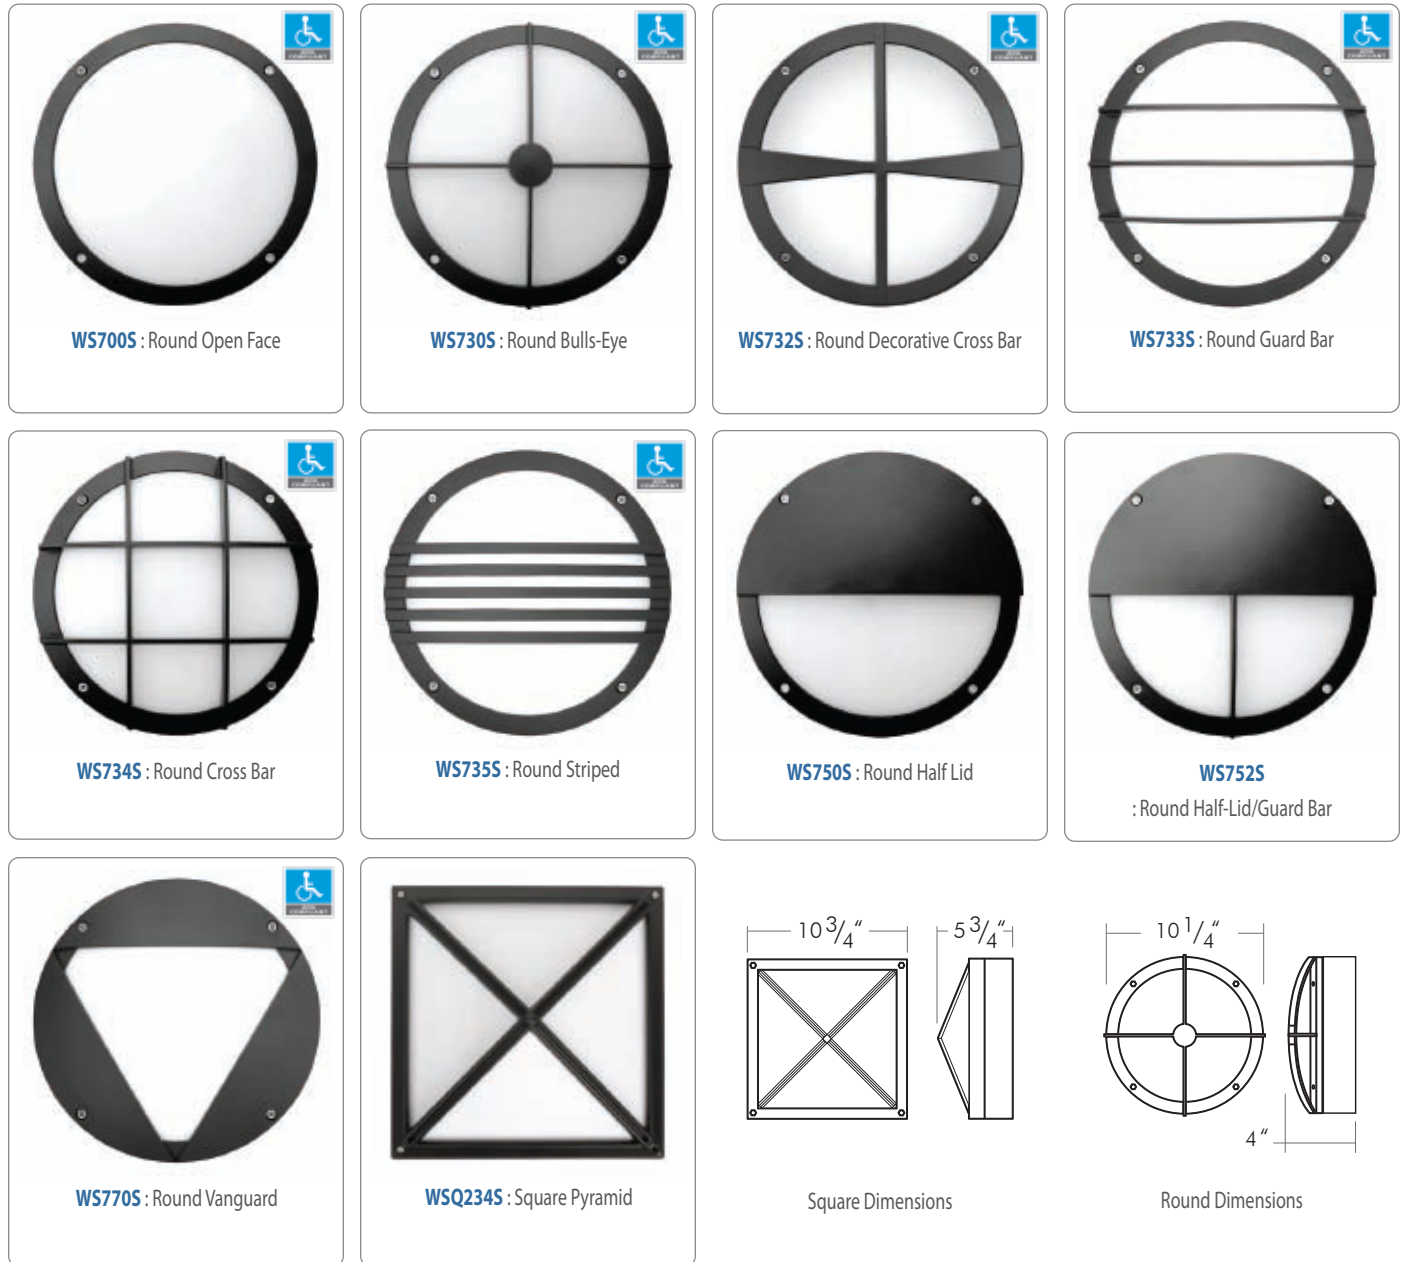

### LED 10-INCH SURFACE-MOUNT WALL LUMINAIRE ORDERING Example: **WS725SB-L15UE-D10-RGBW**

ITEM #	FINISH	LUMEN	OPTION	COLOR TEMPERATURE
<b>WS700S</b> : Open Face	<b>B</b> : Black	<b>-L06</b> : 10W 600Lm	<b>Blank</b> : 120V	<b>-T30</b> : 3000K
<b>WS730S</b> : Bulls-Eye	<b>W</b> : White *	<b>-L11</b> : 15W 1,100Lm**	<b>UE</b> : 120V/277V	<b>-T40</b> : 4000K
<b>WS732S</b> : Decorative Cross Bar	<b>S</b> : Silver *	<b>-L15</b> : 20W 1,500Lm***	<b>UE-D10</b> : 120V/277V 0-10 Dimming	<b>-T50</b> : 5000K
<b>WS733S</b> : Guard Bar	<b>BZ</b> : Bronze *		<b>UE-EM</b> : Remote Emergency Backup	<b>-RGBW</b> : Color Changing (Consult Factory)
<b>WS734S</b> : Cross Bar				
<b>WS735S</b> : Striped				
<b>WS750S</b> : Half Lid				
<b>WS752S</b> : Half-Lid/Guard Bar				
<b>WS770S</b> : Vanguard				
<b>WSQ234S</b> : Square Pyramid				

\* Special Order. Minimum order or extended lead time may apply. Consult Factory.

\*\* Only for WS750S and WS752S. \*\*\* Not available for WS750S and WS752S.