


BL2 - LUMENPOLE

PATH/WALKWAY LIGHTING 600LM - 1500LM (12W-30W)

- 0-10V Dimming
- 3000K or 4000K*
- IP67 & IK08 rated

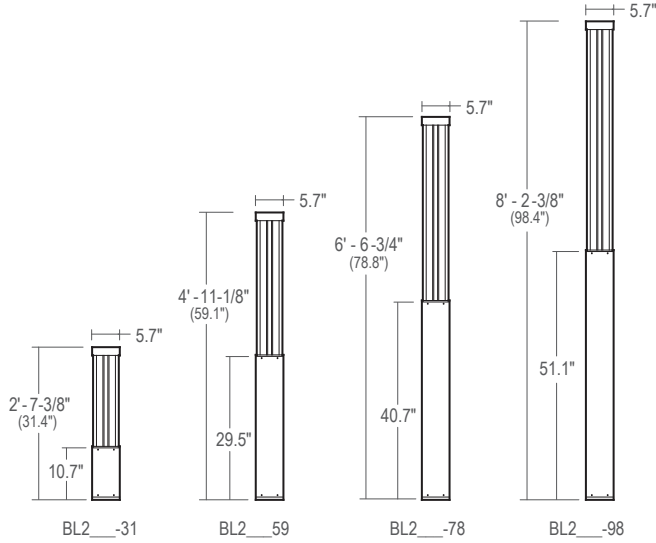

ORDERING – Example: BL2-T30-31-W-24

BL2		Color Temperature		Length		Finish		Power Input		Driver	
Fixture	Color Temperature	Length	Finish	Power Input	Driver	Fixture	Color Temperature	Length	Finish	Power Input	Driver
BL2	3000K	-T30	12W, 31.5" H	-31	Black	Blank	24V	-24¹	0-10V Dimming	Blank	
	4000K	-T40	18W, 59.1" H	-59	(Standard Color)		120V	-120			
			24W, 78.7" H	-78	White	W	277V	-277			
			30W, 98.4" H	-98							

¹24V Power Input does not include LED power supply (by others)

SPECIFICATION

Output

Lumens: 1500 Max. Lumens, delivered

Efficacy: (lm/W): 50 lm/W

Electrical

Input Voltage: Available in 24V, 120V or 277V

Power Consumption: 12W-30W

Control

0-10V Dimming.

Lumen Maintenance

L70 Life: 35,000 Hours for ambient temperatures under 100°F.

Physical

Dimensions (Height x Diameter):

BL2 ____-31: 31.5" x 5.7"

BL2 ____-59: 59.1" x 5.7"

BL2 ____-78: 78.7" x 5.7"

BL2 ____-98: 98.4" x 5.7"

Housing Material: Extruded Aluminum

Lens: High Impact Poly-Carbonate

Mounting: Mounting via hidden anchor bolts

Temperature Range: -20C to 40C (-4F to 104F)

Certification

Complies to UL1598 and ANSI/UL 8750. IP66. IK08 rating for impact resistance.

Warranty

3-Year Warranty