


## CH4R-FRM - 4" C-SERIES REMODEL HOUSING FOR CRTR4L



Ceiling Cut-Out: 5-00"  
Ceiling Thickness: 1-1/4" max

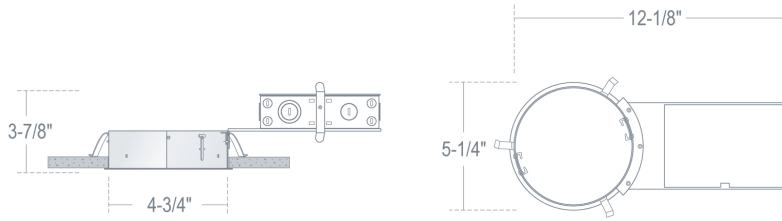

### SPECIFICATION

**Application:** Commercial-grade recessed LED downlight housing for medium to high ceilings in commercial and architectural spaces.

**Mounting:** : Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Safety Labels:** ETL/cETL listed to UL1598 and UL8750. Suitable for dry, damp and wet locations. NYC approved: Calendar #41937.

### COMPATIBILITY



CRTR4L

4" COMMERCIAL LED  
RETROFIT



CRTR4L

4" COMMERCIAL LED  
RETROFIT AMBER

Note: Wattage limitations on compatible items must be met.

### FEATURE:



2022.08.09