



Lineo Tilt Pro - Linkable 120V LED Strip

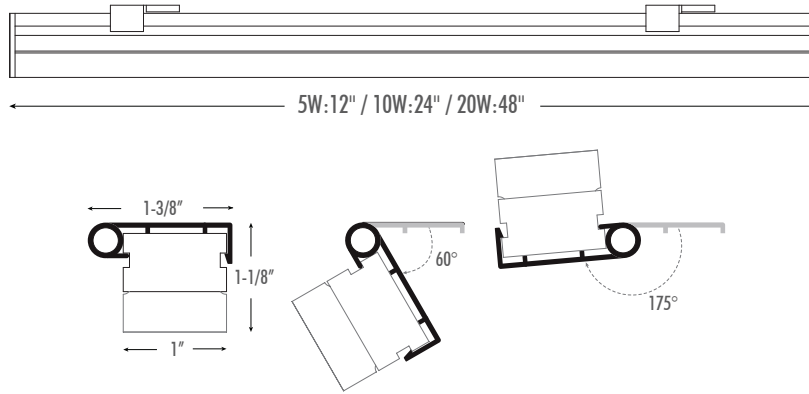

Applications:

General and task illumination of compact spaces such as counters, workstations, shelving and retail displays.

Features:

3-Wire Dimming modular system allows for tool free installation by quickly linking bars from end to end. Optional accessory JBox (DLN4A1) with integral On/Off Switch & KO's for Hard wiring input as well as clear polycarbonate lens to protect lamp from dust and damage. Available in Warm White (3000K), Neutral White (3500K) & Cool White (4000K) Color Temperature or integral switch for Selecting CCT 3000K / 3500K / 4000K (3-4K). Each Fixture supplied with (2) adjustable tilt mounting clips, screws and end-to-end connectors. For supplied with (2) temperatures please consult factory.

Optics:

Wide soft distribution without hotspots 120Lm/W. L70: 50,000 hrs.

Housing:

Heavy-duty extruded aluminum housing with integral energy efficient electronic drive.

Mounting:

Universal steel c-clips for surface mounting with 175° field adjustable tilt with locking settings providing stainless-steel continuous channel of shadow-free illumination.

Listing:

ETL listed to UL Standards for dry locations. 3 Year Warranty.

Note:

A maximum of 14 fixture links per live feed.

Available Accessories:

- DLN4A1: White Hardwire J-Box
- DLN4A2-6X: 6" Middle Connector
- DLN4A2-12: 12" Middle Connector
- DLN4A2-36: 36" Middle Connector
- DLN4A3-72: 72" Power Plug Connector

DLN4L-5W-30K	
System Power (Watts)	5.1W
Color Temperature	2958K
CRI:	89.3
R9 Value	46
Lumens Delivered (lm)	518.46
CBCP	154
PF	0.91


Cone Chart

Height (FT)	Beam Diameter	Foot Candle
2.0'	7.5'	38.5
3.0'	11.2'	17.1
4.0'	14.9'	9.6
5.0'	18.6'	6.2
6.0'	22.4'	4.3

Luminance Data (cd/sq.m)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	10471	11811	18842
55	8846	10217	18642
65	7126	8449	18409
75	5242	6411	18301
85	3397	4323	21086

Luminance Data (cd/sq.m)

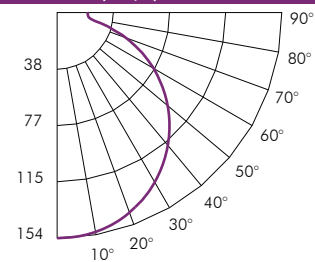


Example: DLN4L53K


Ordering	FIXTURE	COLOR TEMP	OPTIONS	ACCESSORIES
DLN4L	5 5W 12" (518Lm) 10 10W 24" (1100Lm) 20 20W 48W (2100Lm)	-30K 3000K, 90 CRI -35K 3500K, 90 CRI -40K 4000K, 90 CRI -DLV-TS354 30K/35K/40K, 90 CRI	-D 120V ELV Dimming	Blank None /DLN4A1 Hardwire Box /DLN4A2-6X 6" Dark Zone Connector /DLN4A2-12 12" Middle Connector /DLN4A2-36 36" Middle Connector /DLN4A3-72 72" Plug Connector

2023.08.28

LINEO (DLN4) ACCESSORIES

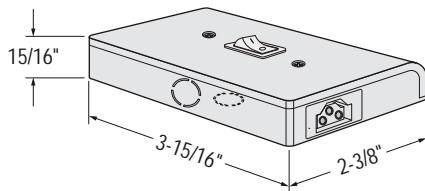

DLN4A1
WHITE HARDWIRE BOX

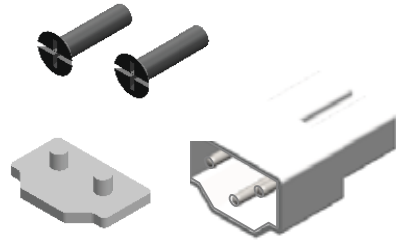

DLN4 CLIP SET
One Clip Set included per fixture

CONTAINS:
2 X STAINLESS STEEL CLIPS
1 X END TO END CONNECTOR
1 X CONNECTOR CAP
2 X FLATHEAD SCREW



DLN4A2: (-6, -12, -36)
6", 12", & 36" MIDDLE CONNECTOR



DLN4A3-72:
72" PLUG IN CONNECTOR
(NOT TO SCALE)