


JXLD300S - CIRCA (3W LED) INTERJACK DROP PENDANT

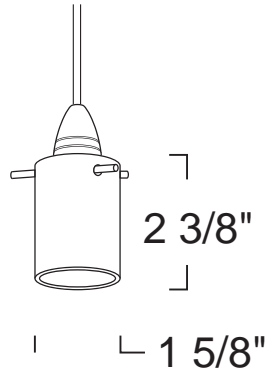

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Frosted, Blue and Yellow.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Only available in Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD300SFR-24/LPELD-DLV

JXLD300S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD300S	FR :Frosted	-24 :24"	Blank :Natural Metal	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	BL :Blue	-36 :36"		/LPELD-D10 :120V/0-10V Dimming 4" Canopy
	YL :Yellow	-48 :48"		/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
		-60 :60"		/LFCJ :12V Flexicurve
		-72 :72"		/L20HTW :12V 2" Panel Mount Canopy

ID#: 3371

JXLD327S - DOME (3W LED) INTERJACK DROP PENDANT

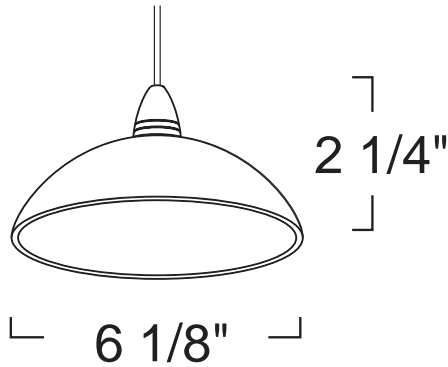

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Confetti 1, Confetti 2, Confetti 3, Blue/Green/Red, Blue, Green and White.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Available in Black, White and Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10v Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD327SCF1-24B/LPELD-DLV

JXLD327S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD327S	CF1 :Confetti 1	-24 :24"	B :Black	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	CF2 :Confetti 2	-36 :36"	W :White	/LPELD-D10 :120V/0-10v Dimming 4" Canopy
	CF3 :Confetti 3	-48 :48"	N :Natural Metal	/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
	BG :Blue/Green/Red	-60 :60"		/LFCJ :12V Flexicurve
	BL :Blue	-72 :72"		/L20HTW :12V 2" Panel Mount Canopy
	GR :Green			
	W :White			

ID#: 3367

JXLD328S - CONE (3W LED) INTERJACK DROP PENDANT

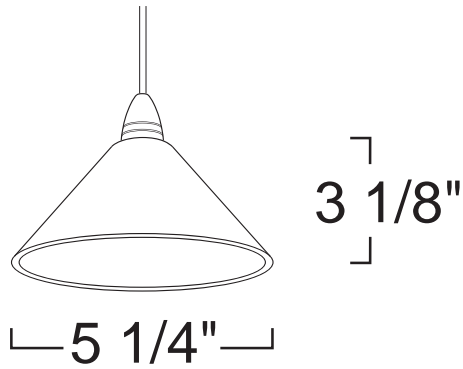

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in White, Blue, Yellow and Green.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Available in Black, White and Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD328SW-24B/LPELD-DLV

JXLD328S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD328S	W :White	-24 :24"	B :Black	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	BL :Blue	-36 :36"	W :White	/LPELD-D10 :120V/0-10V Dimming 4" Canopy
	YL :Yellow	-48 :48"	N :Natural Metal	/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
	GR :Green	-60 :60"		/LFCJ :12V Flexicurve
		-72 :72"		/L20HTW :12V 2" Panel Mount Canopy

ID#: 3366

JXLD330S - VERTIS (3W LED) INTERJACK DROP PENDANT

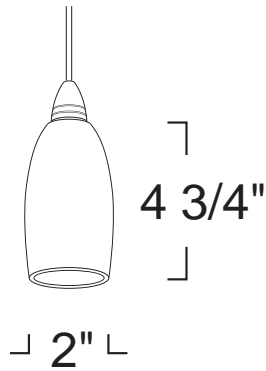

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Blue, White, Green and Yellow.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Available in Black, White and Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD330SBL-24B/L20HTW

JXLD330S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD330S	BL :Blue	-24 :24"	B :Black	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	W :White	-36 :36"	W :White	/LPELD-D10 :120V/0-10V Dimming 4" Canopy
	GR :Green	-48 :48"	N :Natural Metal	/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
	YL :Yellow	-60 :60"		/LFCJ :12V Flexicurve
		-72 :72"		/L20HTW :12V 2" Panel Mount Canopy

ID#: 3364

JXLD331S - CIGARRO (3W LED) INTERJACK DROP PENDANT

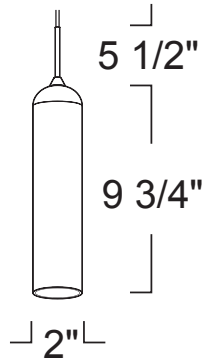

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Amber and Satin White.

Cable Length: Field Cuttable Only available in 20".

Cable Finish: Only available in Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD331SAM/LPELD-DLV

JXLD331S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD331S	AM :Amber SW :Satin White	Blank :20"	Blank :Metal	/LPELD-DLV :120V/ELV Dimming 4" Canopy /LPELD-D10 :120V/0-10V Dimming 4" Canopy /LPELD-277-D10 :277V/0-10V Dimming 4" Canopy /LFCJ :12V Flexicurve /L20HTW :12V 2" Panel Mount Canopy

ID#: 3368

JXLD336S - OVAL DROP (3W LED) INTERJACK DROP PENDANT

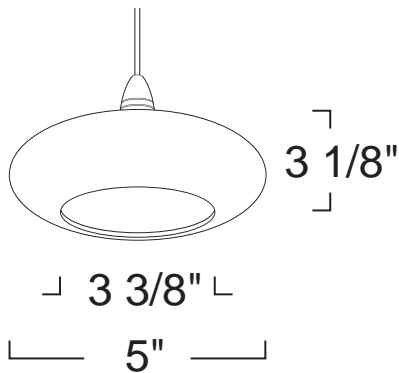

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Blue and Yellow.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Available in Black, White and Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD336SBL-24B/LPELD-DLV

JXLD336S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD336S	BL :Blue	-24 :24"	B :Black	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	YL :Yellow	-36 :36"	W :White	/LPELD-D10 :120V/0-10V Dimming 4" Canopy
		-48 :48"	N :Natural Metal	/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
		-60 :60"		/LFCJ :12V Flexicurve
		-72 :72"		/L20HTW :12V 2" Panel Mount Canopy

ID#: 3369

JXLD345S - COVE (3W LED) INTERJACK DROP PENDANT

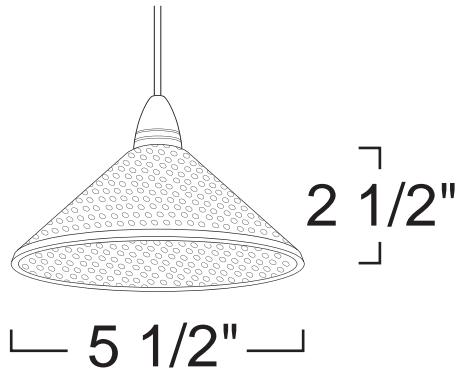

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Frosted, Blue and Amber.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Available in Black, White and Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26


FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD345SFR-24B/LPELD-DLV

JXLD345S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD345S	FR :Frosted	-24 :24"	B :Black	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	BL :Blue	-36 :36"	W :White	/LPELD-D10 :120V/0-10V Dimming 4" Canopy
	AM :Amber	-48 :48"	N :Natural Metal	/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
		-60 :60"		/LFCJ :12V Flexicurve
		-72 :72"		/L20HTW :12V 2" Panel Mount Canopy

ID#: 3370

JXLD1080S - GYPSY (3W LED) INTERJACK DROP PENDANT

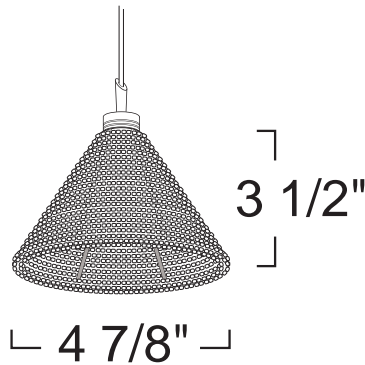

SPECIFICATION

12V 3W LED

Application: Add a touch of elegance to your design and make an architectural statement. These attractive pendants create a signature look to any environment.

InterJack System: Connection plug allows for utilizing a variety of mounting options with the same glass design. See compatibility chart for different methods. All hardware included in product packaging.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heatsink. Satin Nickel finish.

Dimming: Dims down to 10% using most Electronic Low Voltage (ELV) Dimmers.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Shade Color: Available in Red and Pearl.

Cable Length: Field Cuttable Available in 24", 36", 48", 60" and 72".

Cable Finish: Only available in Natural Metal.

Mounting: Available in 120V/ELV Dimming 4" Canopy, 120V/0-10V Dimming 4" Canopy, 277V/0-10V Dimming 4" Canopy, 12V Flexicurve and 12V 2" Panel Mount Canopy.

Made in USA

LED Details:

3W 260 Lumens Delivered
 Color Rendering Index (CRI): 80
 Color Temperature: 3000K
 Lamp Equivalents: 35W Halogen BiPi

2017.5.26

FEATURE:  U.S. Made

ORDERING EXAMPLE : JXLD1080SRD-24/LPELD-DLV

JXLD1080S	SHADE COLOR	CABLE LENGTH	CABLE FINISH	MOUNTING
JXLD1080S	RD :Red	-24 :24"	Blank :Natural Metal	/LPELD-DLV :120V/ELV Dimming 4" Canopy
	PR :Pearl	-36 :36"		/LPELD-D10 :120V/0-10V Dimming 4" Canopy
		-48 :48"		/LPELD-277-D10 :277V/0-10V Dimming 4" Canopy
		-60 :60"		/LFCJ :12V Flexicurve
		-72 :72"		/L20HTW :12V 2" Panel Mount Canopy

ID#: 3365