



LCMPD5RP : 5" LUMENPAD ROUND

LED DOWNLIGHT PENDANT MOUNT 1000LM (11W)

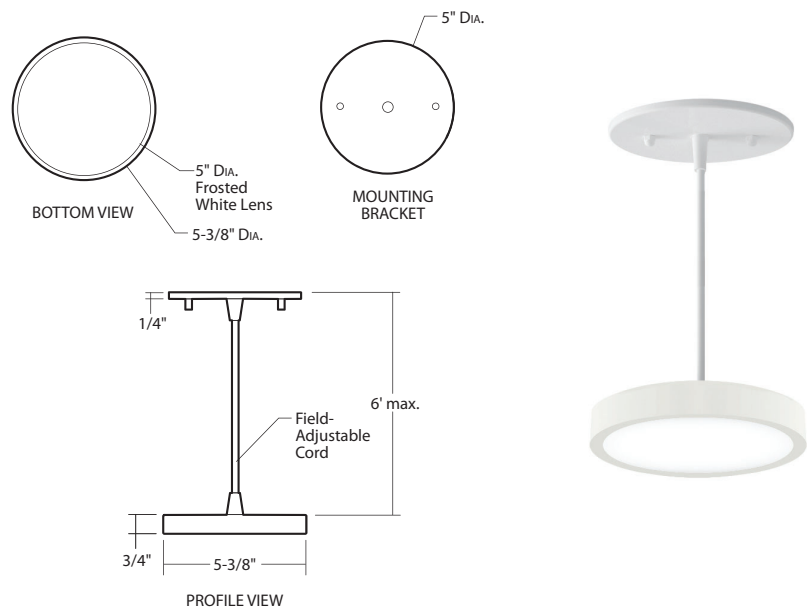

- Color Rendering Index: 90 CRI
- Lamp Equivalent: 65W BR30
- Super Slim 1" thick with die-cast aluminum frame
- Field-adjustable, 6' max. length Pendant
- 3-Year Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant

ORDERING : LCMPD5RPBZ-LU10-TS30

LCMPD5RP						
Fixture	Finish	Uplight	Dimming/Voltage	Color Temperature	Material	Mounting

Finish ²		Color Temperature		Mounting	
All White	W	2700K (90 CRI)	-TS27⁷	Surface JBox Mount	Blank
All Black	B	3000K (90 CRI)	-TS30	Track - 1 & 2-Circuit/1-Neutral	-1C1N
Silver w/black cord	S	3500K (90 CRI)	-TS35	Track - 2-Circuit/2-Neutral	-2C2N
Bronze w/black cord	BZ	4000K (90 CRI)	-TS40	Track - 3-Circuit/1-Neutral	-3C1N
Matt Gold w/black cord	G⁸	5000K (90 CRI)	-TS50⁷		
Matt Gold w/white cord	GW⁸	ColorSelect 2700K/ 3000K/3500K/4000K 5000K (90 CRI)	-TS2750⁷		
Uplight		Material			
None	Blank	Die-Cast Aluminum	Blank		
1000lm	-LU10	Non-Conductive Polycarbonate	-PC¹		
Dimming/Voltage ⁴					
ELV-Dimming (120V) 1000lm	Blank³				
0-10V Dimming	UE-D10^{5,6}				

¹ Special Order for Non-Conductive Polycarbonate.

² Field paintable ring options available. Consult factory.

³ California Title 24/JA8 compliant with (Blank) ELV dimming (120V) only.

⁴ Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.

⁵ Remote Emergency Battery Back Up Option only available for (UE-D10).

⁷ Not available for Uplight.

⁸ Special Order. Extended lead time.

SPECIFICATION

Application

The 5" LumenPad Round LED Downlight Pendant Mount floats with elegance in contemporary architectural applications, a unique combination of innovative, elegantly minimalist design and high-quality LED performance. The luminaire is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Super thin profile is unobtrusive in design and has low glare. Lens is a Polycarbonate Frosted White Lens.

Housing

Die-cast aluminum frame. Optional (-PC) Non-Conductive Polycarbonate is available to minimize the risk of electrical shock from housing.

Mounting:

Universal mounting hardware allows mounting to all standard octagonal electrical junction boxes. White pendant mounting bracket and white field-adjustable cord for White finish. Black pendant mounting bracket and black field-adjustable cord for Black finish. Silver and Bronze finish come standard with Black pendant mounting bracket and black cord. Also available with the following Track Mounting: 1 & 2-Circuit/1-Neutral (-1C1N), 2-Circuit/2-Neutral (-2C2N), 3-Circuit/1-Neutral (-3C1N).

Lumen Maintenance:

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Electrical Components

Thermal Management:

Effective thermal dissipation facilitated by integral heat sink design for maximum heat rejection to provide long LED life.

Temperature Rating:

Maximum temperature 85°C. Minimum temperature, -20°C.

Driver:

Smoothly dims down to 5% with standard Low Voltage dimmers. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Color Temperature:

Available in 2700K, 3000K, 3500K, 4000K, 5000K, ColorSelect 2700K/3000K/3500K/4000K/5000K, 90 CRI (Color Rendering Index). LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Finishes

High quality powder coat finish for maximum durability. Available in White, Black, Silver, Bronze and Matt Gold.

Certifications and Listings

ETL/cETL listed. Assembled in USA.

SPECIFICATION

Caution

Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Warranty

Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C. installations exceeding this temperature will result in reduced LED lamp life and avoided warranty.

Title 24/JA8 Compliant

- LCMPD5RP-T27
- LCMPD5RP-T30
- LCMPD5RP-T35
- LCMPD5RP-T40
- LCMPD5RP-TS354

Ready to Ship Items

- LCMPD5RPW-T-27
- LCMPD5RPW-T-30
- LCMPD5RPW-T-35
- LCMPD5RPW-T-40

LCMPD5RW-TS50 (1000lm, 11W, 5000K, CRI 90)

Height	Beam Diameter	FC
8.0'	26.21'	4.50
9.0'	29.49'	3.55
10.0'	32.77'	2.88
11.0'	36.04'	2.38
12.0'	39.32'	2.00

LCMPD5RWUE-D10-TS40 (1000lm, 11W, 4000K, CRI 90)

Height	Beam Diameter	FC
8.0'	26.21'	4.69
9.0'	29.49'	3.70
10.0'	32.77'	3.00
11.0'	36.04'	2.48
12.0'	39.32'	2.08