



LCMPD7RP : 7" LUMENPAD ROUND

LED DOWNLIGHT PENDANT MOUNT 1300LM (14W)

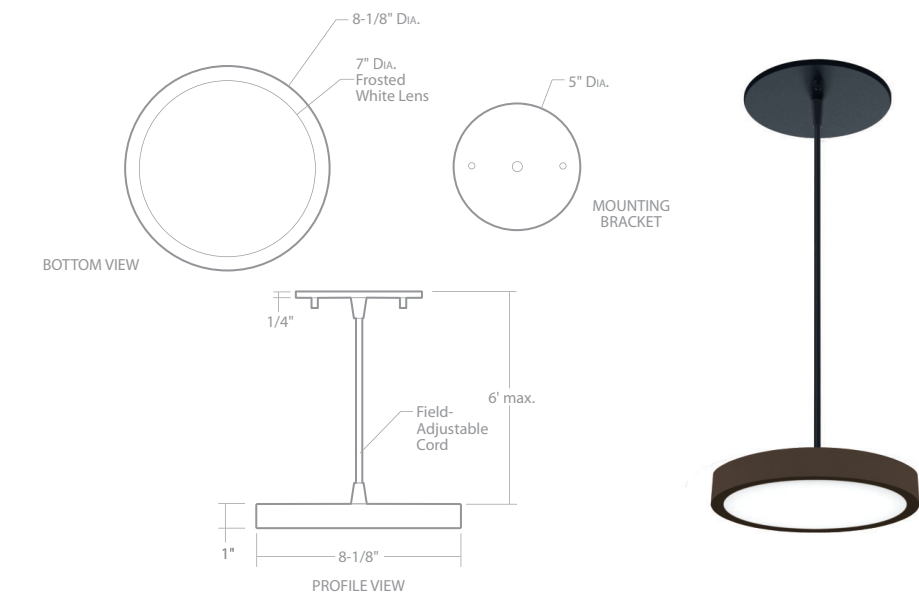

- Color Rendering Index: 90 CRI
- Lamp Equivalent: 65W BR30
- Super Slim 1" thick with die-cast aluminum frame
- Field-adjustable, 6' max. length pendant
- Optional 1000lm Uplight available
- 3-Year Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant

ORDERING : LCMPD7RPBZ-TS30

LCMPD7RP

Fixture

Finish

Uplight

Dimming/Voltage

Color Temperature

Material

Mounting

Finish ²		Color Temperature		Mounting	
All White	W	2700K (90 CRI)	-TS27 ^{7,8}	Surface JBox Mount	Blank
All Black	B	3000K (90 CRI)	-TS30	Track - 1 & 2-Circuit/1-Neutral	-1C1N
Silver w/black cord	S	3500K (90 CRI)	-TS35	Track - 2-Circuit/2-Neutral	-2C2N
Bronze w/black cord	BZ	4000K (90 CRI)	-TS40	Track - 3-Circuit/1-Neutral	-3C1N
Matt Gold w/black cord	G ⁸	5000K (90 CRI)	-TS50 ^{7,8}		
Matt Gold w/white cord	GW ⁸	ColorSelect 2700K/ 3000K/3500K/4000K 5000K (90 CRI)	-TS2750 ^{7,8}		
Uplight		ColorSelect 3000K/ 3500K/4000K (90 CRI)	-TS354 ⁷		
None	Blank				
1300lm	-LU10				
Dimming/Voltage ⁴		Material			
ELV-Dimming (120V) 2000lm	Blank ^{3,6}	Die-Cast Aluminum	Blank		
0-10V Dimming	UE-D10 ⁵	Non-Conductive Polycarbonate	-PC ¹		

¹ Special Order for Non-Conductive Polycarbonate.

² Field paintable ring options available. Consult factory.

³ California Title 24/JA8 compliant with (Blank) ELV dimming (120V) only.

⁴ Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.

⁵ Remote Emergency Battery Back Up Option only available for (UE-D10).

⁶ ELV Dimming (120V) not available for -TS2750 and -TS50.

⁷ Not available for Uplight.

⁸ Special Order. Extended lead time.

SPECIFICATION

Application

The 7" LumenPad Round LED Downlight Pendant Mount floats with elegance in contemporary architectural applications, a unique combination of innovative, elegantly minimalist design and high-quality LED performance. The luminaire is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Super thin profile is unobtrusive in design and has low glare. Lens is a Polycarbonate Frosted White Lens.

Housing

Die-cast aluminum frame. Optional Non-Conductive Polycarbonate available.

Mounting:

Universal mounting hardware allows mounting to all standard octagonal electrical junction boxes. White pendant mounting bracket and white field-adjustable cord for White finish. Black pendant mounting bracket and black field-adjustable cord for Black finish. Silver and Bronze finish come standard with Black pendant mounting bracket and black cord. Also available with the following Track Mounting: 1 & 2-Circuit/1-Neutral (-1C1N), 2-Circuit/2-Neutral (-2C2N), 3-Circuit/1-Neutral (-3C1N).

Lumen Maintenance:

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Electrical Components

Thermal Management:

Effective thermal dissipation facilitated by integral heat sink design for maximum heat rejection to provide long LED life.

Temperature Rating:

Maximum temperature 85°C. Minimum temperature, -20°C.

Driver:

Smoothly dims down to 5% with standard Low Voltage dimmers. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Color Temperature:

Available in 2700K, 3000K, 3500K, 4000K, 5000K, ColorSelect 2700K/3000K/3500K/4000K/5000K and ColorSelect 3000K/3500K/4000K, 90 CRI (Color Rendering Index). LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Finishes

High quality powder coat finish for maximum durability. Available in White, Black, Silver, Bronze and Matt Gold.

Certifications and Listings

ETL/cETL listed. Assembled in USA.

Caution

Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Warranty

Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C. installations exceeding this temperature will result in reduced LED lamp life and avoided warranty.

Title 24/JA8 Compliant

LCMPD7RP-T27
LCMPD7RP-T30
LCMPD7RP-T35
LCMPD7RP-T40
LCMPD7RP-TS354

LCMPD7RW-TS40 (1100lm, 14W, 4000K, CRI 90)

CANDELA TABULATION

Height	Beam Diameter	FC
6.0'	20.99'	9.86
8.0'	27.99'	5.54
10.0'	34.99'	3.55
12.0'	41.99'	2.46
14.0'	48.99'	1.81

LCMPD7RWUE-D10-TS50 (1400lm, 14W, 5000K, CRI 90)

CANDELA TABULATION

Height	Beam Diameter	FC
6.0'	19.47'	13.18
8.0'	25.96'	7.41
10.0'	32.45'	4.74
12.0'	38.94'	3.29
14.0'	45.42'	2.42