

LCMPD_QP : LUMENPAD SQUARE


LED DOWNLIGHT PENDANT MOUNT 1000LM - 2000LM (11W - 22W)




- STEM H: 12", 18", 24", 36" and 48"
 *Stem Height is 96" Max Height and Field Cuttable to 2" Min. (other Custom Cuttable Heights available, Consult Factory)

• Super Slim 1" thick with die-cast aluminum frame


• Color Rendering Index: 90 CRI
 Lamp Equivalent: 65W BR30



LCMPD5QP



LCMPD7QP



LCMPD12QP

ORDERING : LCMPD5QP BZ-LU10-UE-D10-TS30-1C1N

Fixture	Finish	Uplight	Control	Color Temperature	Mounting		
1000lm (11W)	LCMPD5QP	All White	W	None	Blank	ELV-Dimming (120V)	Blank ²
1300lm (14W)	LCMPD7QP	All Black	B	LCMPD5QP 1000lm	-LU10⁸	0-10V Dimming (120V/277V)	UE-D10⁴
2000lm (22W)	LCMPD12QP	Silver w/black cord	S⁷	LCMPD7QP 1300lm	-LU10⁸	Athena Wireless Node (120V)	-AWN¹
		Bronze w/black cord	BZ⁷	LCMPD12QP 1000lm (up to 15W)	-LU10⁸	UniSense - Integral Motion/Photosensor (120V/277V)	-UE-SUN-INT¹¹
		Matt Gold w/black cord	G⁵	LCMPD12QP 3000lm (up to 35W)	-LU30⁸	Casambi Wireless Dimming (120V/277V)	-DCSM¹
		Matt Gold w/white cord	GW⁵			BubblyNet Wireless System (120V/277V)	-DBNT¹
Color Temperature		Mounting					
2700K (90 CRI)	-TS27^{5,6}	Surface JBox Mount	Blank				
3000K (90 CRI)	-TS30	1CCT/1NT Connector	-1C1N				
3500K (90 CRI)	-TS35	2CCT/2NT Connector	-2C2N				
4000K (90 CRI)	-TS40	3CCT/1NT Connector	-3C1N				
5000K (90 CRI)	-TS50^{5,6}	12" Stem Pendant	-STM12				
		18" Stem Pendant	-STM18				
		24" Stem Pendant	-STM24				
		36" Stem Pendant	-STM36				
		48" Stem Pendant	-STM48				
		96" to 2" Stem Pendant	-STM96ADJ⁹				

¹ Special Order. Must be ordered with LCMPD7Q-EMA-BLANK.
² California Title 24/JA8 compliant with (Blank) ELV dimming (120V) only.
³ Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.
⁴ Remote Emergency Battery Back Up Option only available for (UE-D10).
⁵ Special Order. Extended lead time.
⁶ Not available for Uplight.
⁷ Silver and Bronze finish comes standard with Black pendant mounting bracket and cord.
⁸ Uplight option -LU10 is (120V) input only.
⁹ Stem height is 96" max. height and field cuttable to 2" min. (Other custom cuttable heights available. Consult factory)
¹⁰ Field paintable ring options available. Consult factory.
¹¹ Only available for LCMPD7QP.

2025.09.26

SPECIFICATION

Application

The LumenPad Square LED Downlight Pendant Mount floats with elegance in contemporary architectural applications, a unique combination of innovative, elegantly minimalist design and high-quality LED performance. The luminaire is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Super thin profile is unobtrusive in design and has low glare. Lens is a Polycarbonate Frosted White Lens.

Housing

Die-cast aluminum frame. Optional (-PC) Non-Conductive Polycarbonate is available to minimize the risk of electrical shock from housing.

Mounting:

Universal mounting hardware allows mounting to all standard octagonal electrical junction boxes. White pendant mounting bracket and white field-adjustable cord for White finish. Black pendant mounting bracket and black field-adjustable cord for Black finish. Silver and Bronze finish come standard with Black pendant mounting bracket and black cord. Also available with the following Track Mounting: 1 & 2-Circuit/1-Neutral (-1C1N), 2-Circuit/2-Neutral (-2C2N), 3-Circuit/1-Neutral (-3C1N).

Lumen Maintenance:

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Electrical Components

Thermal Management:

Effective thermal dissipation facilitated by integral heat sink design for maximum heat rejection to provide long LED life.

Temperature Rating:

Maximum temperature 85°C. Minimum temperature, -20°C.

Driver:

(Blank) Smoothly dims down to 5% with standard Low Voltage dimmers. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450. (UE-D10) 0-10V dimming works with most 5-wire, 0-10V dimmers. Factory qualified for use with Leviton IP710-DLZ.

Color Temperature:

Available in 2700K, 3000K, 3500K, 4000K and 5000K 90 CRI (Color Rendering Index). LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Finishes

High quality powder coat finish for maximum durability. Available in White, Black, Silver, Bronze and Matt Gold.

Certifications and Listings

ETL/cETL listed. Assembled in USA.

SPECIFICATION (Continued)

Caution

Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Warranty


Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C (95°F), installations exceeding this temperature will result in reduced LED lamp life and avoided warranty.

Title 24/JA8 Compliant:

LCMPD5QP-TS27	LCMPD7QP-TS27	LCMPD12QP-TS27
LCMPD5QP-TS30	LCMPD7QP-TS30	LCMPD12QP-TS30
LCMPD5QP-TS35	LCMPD7QP-TS35	LCMPD12QP-TS35
LCMPD5QP-TS40	LCMPD7QP-TS40	LCMPD12QP-TS40
LCMPD5QP-TS354	LCMPD7QP-TS354	LCMPD12QP-TS354

Unisense™ PROGRAMMABLE MOTION + DAYLIGHT (UE-SUN-INT)

- Microwave and PIR (Passive Infrared) sensors depending on option
- Daylight harvesting
- Dusk/dawn sensing capabilities
- Motion Sensor

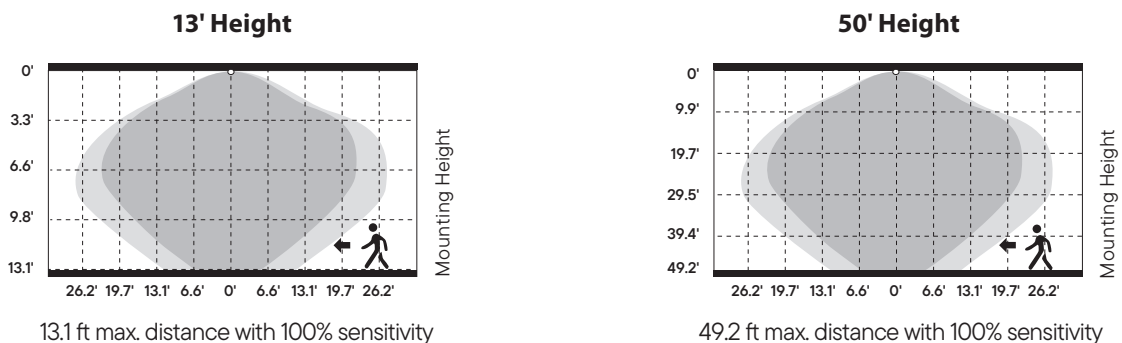

Well Detected Area Possibly Detected Area 1.6-3.3 ft/s