


LD533V024-60-DLV-JB - 60W 120V/ELV DIMMING DRIVER (24V DC) LINKALED PUCK

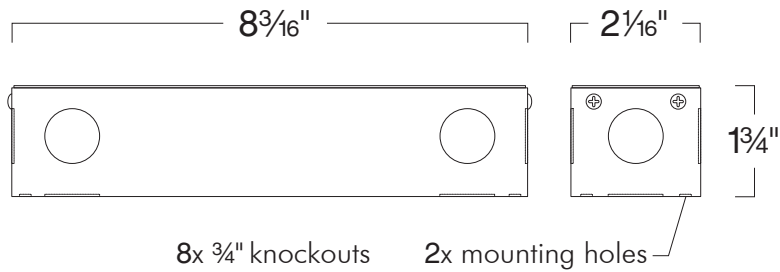

SPECIFICATION

120V AC 60W LED

Features:

- Isolated output power per NEC and UL Safety Requirements
- Auto-Rest; Short Circuit, Overload and Thermal Protection
- Listed Wiring Enclosure with Multiple Knockouts
- Remote Mounting up to 18 feet away at full load with 18AWG Wiring

Dimming: Low Voltage dimming works with standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, DVELV-300P, NELV-450 along with 3-Way versions. (-DLV) Dimming Option also compatible with Grafik Eye and Home Works Dimming Interfaces.

Electrical:

- Input Voltage:** 120VAC/60 HZ
- Input Current:** 0.5A at 120V AC
- Allowable Temperature:** -10F to 130F
- Efficiency:** 85% Min
- Power Factor:** >98%
- THD Max:** 10%
- IP RATING:** IP60 Dry Location Only

Label: cETL Listed

COMPATIBILITY

<p>LULEDBP PROFESSIONAL GRADE LED STICK</p>	<p>LUTKLED24V1 24V 12" STRIP</p>	<p>LK136SLED LINKALED PUCK LIGHT (SURFACE MOUNTED)</p>
<p>LULEDB LINKALED BAR</p>	<p>LK136LED LINKALED PUCK LIGHT (RECESSED)</p>	<p>LULEDBW WET LOCATION LED BAR</p>
<p>LD5V24-24-PI 24V/24W PLUGIN DRIVER</p>		

Note: Wattage limitations on compatible items must be met.

Benefit:

- Dimmable with ELV Dimmers
- Large J-box for easy connections
- Runs cooler than Magnetic Drivers
- Works in Non-Dimming Applications as well

2016.8.4

ID#: 2745