


## LFH6 - 6" ARCHITECTURAL HOUSING (2-LAMP) 6" ARCHITECTURAL HORIZONTAL COMPACT FLUORESCENT HOUSINGS



Architectural Hanger Bars sold separately.

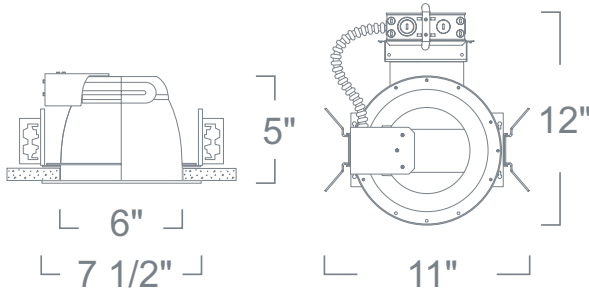

### SPECIFICATION

CFL (1)42W/(2)26W Max

**Application:** Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

**Housing Frame:** 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceilings up to 1 3/4" thick. Triple slot bat-wing hanger brackets accommodate multiple bar hanger systems.

**Mounting:** Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT, 26" C-Channel Strut (C260) for T-bar ceilings and 27" linear hanger bars (L270) for wood joists. Heavy duty 16-gauge, die-formed galvanized steel. 1 1/4" maximum ceiling thickness.

**Ballast:** Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

**Socket Cap:** Heavy-Duty steel socket enclosure with built-in ventilations. Die-cast aluminum fittings. Accepts compatible reflector trims.

**Socket:** Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Accepts 4-Pin lamps with electronic ballast selection.

**Junction Box:** 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

**Insulation Contact:** Non-IC rated housing must be kept 3" from insulation.

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

**Emergency Option:** Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

### COMPATIBILITY

 <b>C260-J</b> ADJUSTABLE C-CHANNEL HANGER BAR SET	 <b>LR6641</b> REFLECTOR W/ GLASS RING	 <b>LRCELD602</b> 6" ARCHITECTURAL SHALLOW LED RETROFIT (1000)
 <b>LR643</b> BAFFLE W/ GLASS ACCENT	 <b>C260</b> C-CHANNEL HANGER BAR SET	 <b>LR664</b> BAFFLE W/ LENS
 <b>LR668</b> CROSS BLADE	 <b>L270</b> LINEAR HANGER BAR SET	 <b>LR661</b> REFLECTOR
 <b>LR661</b> SELF-FLANGED REFLECTOR	 <b>LR669</b> SELF-FLANGED LENSED WALL WASH	 <b>LR641</b> REFLECTOR W/ GLASS ACCENT

Please see website for more compatible items.

Note: All items are UL Listed. Compatible items must be met.

ORDERING EXAMPLE : LFH6213UE-EM

### FEATURE:



LFH6	WATTAGE	BALLAST	OPTIONS
<b>LFH6</b>	<b>213</b> : (2) 13W	<b>UD</b> : 0-10V Dimming (120V/277V)	<b>Blank</b> : None
	<b>213-18</b> : (2) 13W-18W	<b>UE</b> : 120V/277V Electronic	<b>-EM</b> : Emergency (Remote)
	<b>213IC</b> : (2) 13W	<b>ADV-SM</b> : 120V/277V Smart Mate	<b>-EMA</b> : Emergency (Trim)
	<b>218</b> : (2) 18W	<b>ADV-M7</b> : 120V/277V Mark VII Dimming	<b>-FS</b> : Fuse
	<b>226</b> : (2) 26W	<b>ADV-M10</b> : 120V Mark X Dimming*	
		<b>LUT-HL</b> : 120V/277V Lutron 3-Wire Dimming	
		<b>LUT-TW</b> : 120V Tu-wire Dimming	
		<b>UE-347</b> : 347V Electronic	
		<b>E</b> : 120V Electronic	

\* Not available for 13W option.