


## New Construction (IC) w/ MR11 Baffle

### LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

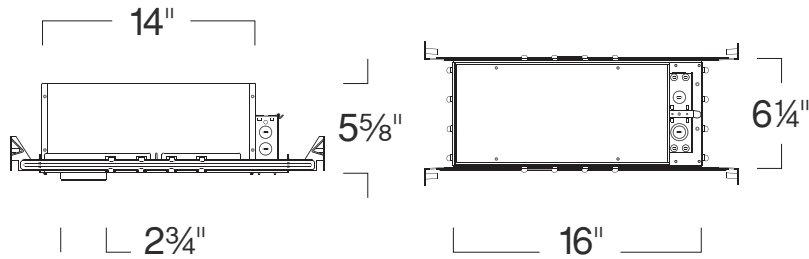

#### SPECIFICATION

Ceiling cut-out: 2 3/4"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Transformer:** Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Insulation Contact:** IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

#### FEATURE:



**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Adjustability** Lamp can be tilted 35° degrees vertically.

**Accessories:** Takes (1) 1 3/8" Media.

**Label:** cETL Listed

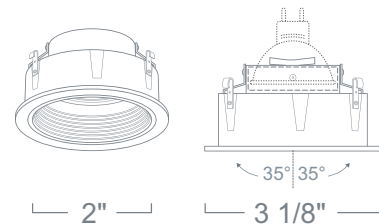

#### NEW CONSTRUCTION (IC)

**LH1299IC** 12V Out 37W Max MR11/MR16

##### OPTION

**LH1299ICA** :37W Airtight IC

#### MR11 BAFFLE

**LR1213** 12V 35W Max MR11

##### FINISH

**LR1213W** :All White  
**LR1213B** :Black Baffle/White Ring  
**LR1213N** :All Natural Metal  
**LR1213CO** :All Copper

**Ordering example:** LH1299ICA/LR1213B