


New Construction (IC) w/ Micro Slot w/ Black Baffle LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

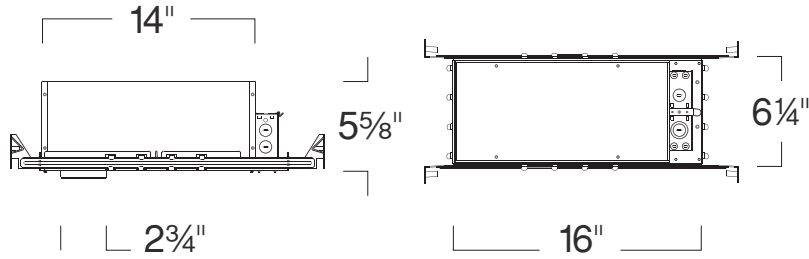

SPECIFICATION

Ceiling cut-out: 2 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: The 2" Micro-Cast accent light is a perfect solution for low-profile design in hard-to-light spaces. They feature an adjustable lamp holder that allows for precise highlighting of desired objects. These low voltage downlight trims are constructed of high quality die-cast aluminum. Available in standard black & white, as well as popular designer finishes of Natural "Raw" Metal, Antique Copper & Mocha.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 35° degrees vertically.

Accessories: Takes up to (2) 1 3/8 Media.

Label: cETL Listed

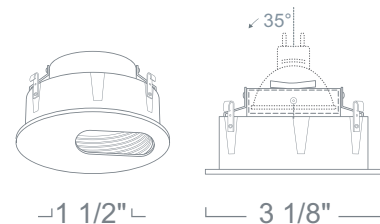

NEW CONSTRUCTION (IC) LH1299IC 12V Out 37W Max MR11/MR16

MICRO SLOT W/ BLACK BAFFLE LR1220 12V 37W Max MR11

Ordering example: LH1299ICA/LR1220B

OPTION

LH1299ICA :37W Airtight IC

TRIM FINISH

- LR1220W :White
- LR1220B :Black
- LR1220N :Natural Metal
- LR1220CO :Copper
- LR1220MO :Mocha