


New Construction (IC) w/ MR16 Reflector LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

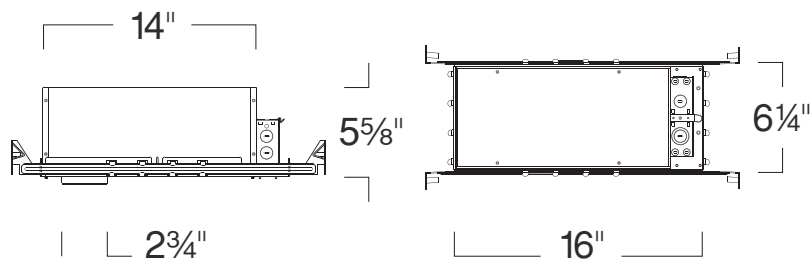

SPECIFICATION

Ceiling cut-out: 2 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: Perfect solution for low-profile design in hard-to-light spaces.


Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Accessories: Takes up to (3) 2" Media.

Label: cETL Listed

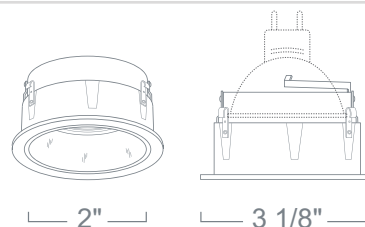

NEW CONSTRUCTION (IC) LH1299IC 12V Out 37W Max MR11/MR16

OPTION
LH1299ICA :37W Airtight IC

MR16 REFLECTOR LR1221 12V/120V 50W MR16

FINISH	RATING
LR1221W :All White	Blank :Damp Location
LR1221B :Black Reflector/ White Ring	-WL :Wet Location
LR1221C :Clear Reflector w/White Ring	
LR1221N :All Natural Metal	
LR1221CO :All Copper	
LR1221SN :Satin Reflector/Natural Ring	

Ordering example: LH1299ICA/LR1221B-WL