


## New Construction (IC) w/ Regressed Frosted Lens

### LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

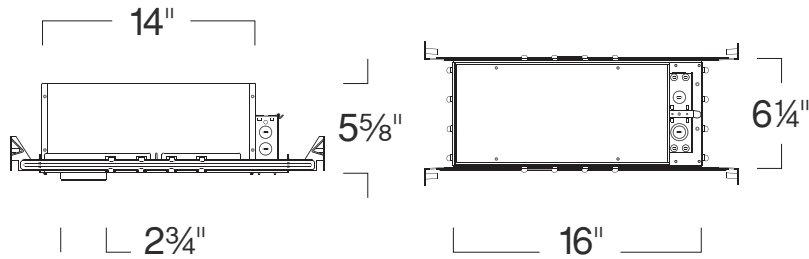

#### SPECIFICATION

Ceiling cut-out: 2 3/4"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Transformer:** Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Insulation Contact:** IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

#### FEATURE:




**Application:** Perfect solution for low-profile design in hard-to-light spaces. The frosted lens provides smooth downlight illumination in bathrooms and showers.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Accessories:** Takes up to (2) Media.

**Label:** cETL Listed

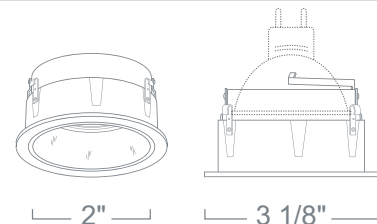

#### NEW CONSTRUCTION (IC)

##### LH1299IC 12V Out 37W Max MR11/MR16

OPTION
LH1299ICA :37W Airtight IC

#### REGRESSED FROSTED LENS

##### LR1222 12V 50W Max MR16

FINISH	RATING
LR1222W :All White	Blank :Damp Location
LR1222B :All Black	-WL :Wet Location
LR1222C :Clear Reflector w/White Ring	
LR1222N :All Natural Metal	
LR1222CO :All Copper	
LR1222MO :All Mocha	
LR1222SN :Satin Reflector/Natural Ring	

Ordering example: LH1299ICA/LR1222N-WL