


## Remodel w/ MR11 Baffle

### LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

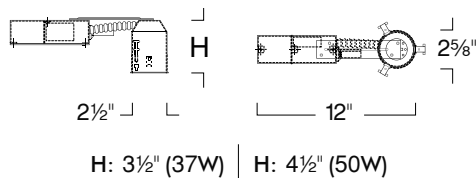

#### SPECIFICATION

Ceiling cut-out: 2 5/8"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Transformer:** Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

#### FEATURE:



**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Adjustability** Lamp can be tilted 35° degrees vertically.

**Accessories:** Takes (1) 1 3/8" Media.

**Label:** cETL Listed

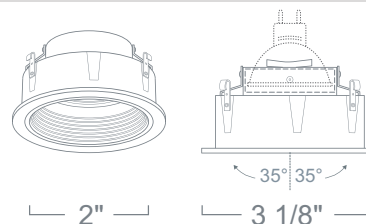

#### REMODEL

##### LH1299R 12V Out MR11/MR16

OPTION	
LH1299R	:37W (120V)
LH1299R-50	:50W (120V)
LH1299R-50-27	:50W Max 277V input

#### MR11 BAFFLE

##### LR1213 12V 35W Max MR11

FINISH	
LR1213W	:All White
LR1213B	:Black Baffle/White Ring
LR1213N	:All Natural Metal
LR1213CO	:All Copper

**Ordering example:** LH1299R-50-27/LR1213B