


Remodel w/ Micro Slot w/ Black Baffle LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

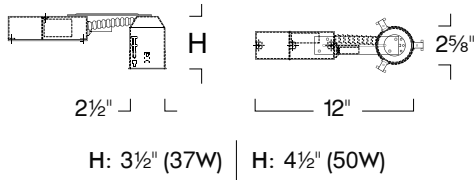

SPECIFICATION

Ceiling cut-out: 2 5/8"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: The 2" Micro-Cast accent light is a perfect solution for low-profile design in hard-to-light spaces. They feature an adjustable lamp holder that allows for precise highlighting of desired objects. These low voltage downlight trims are constructed of high quality die-cast aluminum. Available in standard black & white, as well as popular designer finishes of Natural "Raw" Metal, Antique Copper & Mocha.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be titled 35° degrees vertically.

Accessories: Takes up to (2) 1 3/8 Media.

Label: cETL Listed

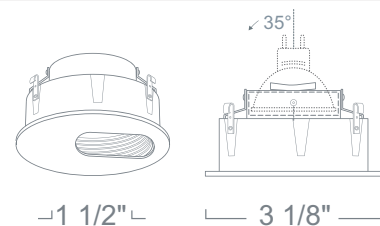

REMODEL LH1299R 12V Out MR11/MR16

OPTION	
LH1299R	:37W (120V)
LH1299R-50	:50W (120V)
LH1299R-50-27	:50W Max 277V input

MICRO SLOT W/ BLACK BAFFLE LR1220 12V 37W Max MR11

TRIM FINISH	
LR1220W	:White
LR1220B	:Black
LR1220N	:Natural Metal
LR1220CO	:Copper
LR1220MO	:Mocha

Ordering example: LH1299R-50-27/LR1220B