


## Remodel w/ Regressed Frosted Lens

### LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

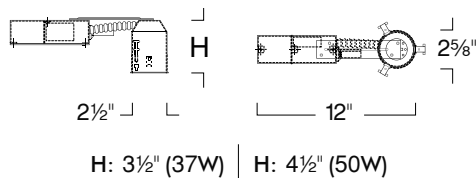

### SPECIFICATION

Ceiling cut-out: 2 5/8"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Transformer:** Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

### FEATURE:




**Application:** Perfect solution for low-profile design in hard-to-light spaces. The frosted lens provides smooth downlight illumination in bathrooms and showers.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Accessories:** Takes up to (2) Media.

**Label:** cETL Listed

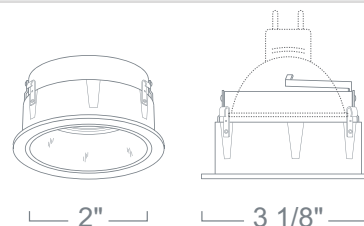

REMODEL	
LH1299R 12V Out MR11/MR16	
OPTION	
LH1299R	:37W (120V)
LH1299R-50	:50W (120V)
LH1299R-50-27	:50W Max 277V input

REGRESSED FROSTED LENS		
LR1222 12V 50W Max MR16		
FINISH	RATING	
LR1222W :All White	Blank :Damp Location	
LR1222B :All Black	-WL :Wet Location	
LR1222C :Clear Reflector w/White Ring		
LR1222N :All Natural Metal		
LR1222CO :All Copper		
LR1222MO :All Mocha		
LR1222SN :Satin Reflector/Natural Ring		

Ordering example: LH1299R-50-27/LR1222N-WL