


Remodel Shallow Housing w/ Reflector 30

LH7 SERIES - 6" LINE VOLTAGE RECESSED LIGHTING

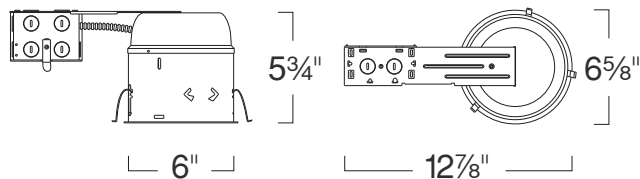

SPECIFICATION

Ceiling cut-out: 6 1/4"

Application: General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with 3/4", 1" and Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed


FEATURE:



Application: Great for basic area lighting of a room or space. The 6" reflector trims produce a low, bright illumination with a choice of reflector and trim ring color combination. The clear reflector produces a maximum light output while minimizing the source. The black reflector creates a "hidden" effect that obscures the glare of the lamp. All of the color choices create an outstanding general illumination that is suitable in both residential and light commercial applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: UL Listed, cETL Listed

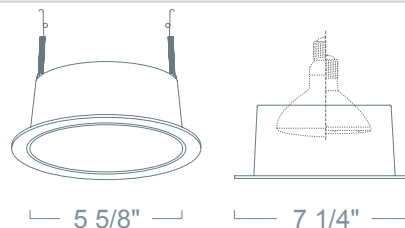

REMODEL SHALLOW HOUSING

LH27RICA 120V 90W Max A19/PAR30/PAR38 MED E26

RATING

LH27RICA :IC Airtight

REFLECTOR 30

LRS30 120V 75W Max R30/PAR30

REFLECTOR FINISH	RING FINISH
LRS30W :White	Blank :White
LRS30B :Black	B :Black
LRS30C :Clear	C :Chrome
LRS30G :Gold	G :Gold
LRS30CO :All Copper*	N :Natural
LRS30S :Satin Haze	CO :Copper
LRS30CH :Champagne Gold	

* Comes standard with a matching ring finish. Use "W" for White Ring.

Ordering example: LH27RICA/LRS30W