


## Standard Shallow E26 Housing w/ Deco Glass Open Cone LH7 SERIES - 6" LINE VOLTAGE RECESSED LIGHTING

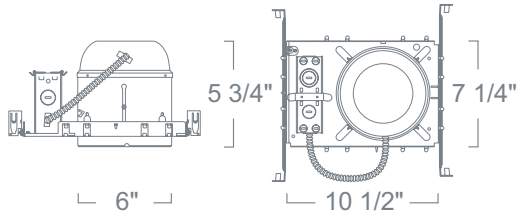

### SPECIFICATION

Ceiling cut-out: 6 1/2"

**Application:** General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

**Housing:** Pre-wired housing adjusts up to a 1 1/2" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs or serrated clips.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Junction Box :** 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** UL Listed, cETL Listed


### FEATURE:



**Application:** Decorative glass trims add a unique architectural dimension to your lighting design. These attractive glass trims that emit a warm and glowing illumination are available in various colors. Each glass trim and color combination will create an artful illumination that compliments any interior environment.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Label:** UL Listed, cETL Listed

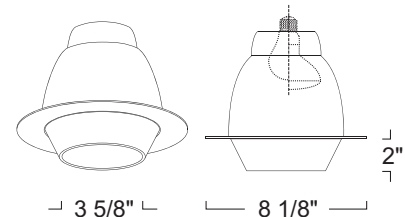

### STANDARD SHALLOW E26 HOUSING LH27 120V 90W Max A19/PAR30/PAR38 MED E26

RATING
LH27A :Airtight
LH27ICA :IC-Airtight

### DECO GLASS OPEN CONE LR370 120V/CFL 100W Max A19/PAR20

REFLECTOR FINISH	RING FINISH	GLASS
LR370 :Clear	Blank :White	-BL :Blue
LR370S :Satin Haze	B :Black	-FR :Frosted
	C :Clear	-AM :Amber
	G :Gold	
	N :Natural	
	CO :Copper	
	MO :Mocha	

Ordering example: LH27A/LR370B-FR