


IC Housing w/ Adjustable Gimbal LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (GU10)

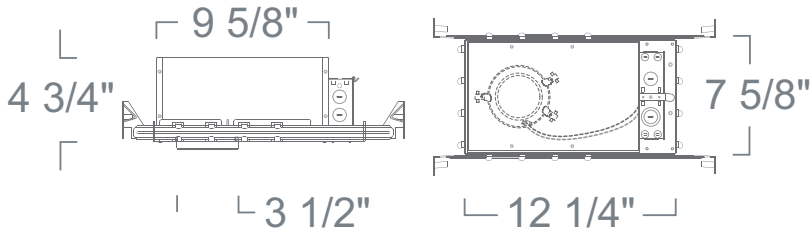

SPECIFICATION

Ceiling cut-out: 3 7/8"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Label: cETL Listed

FEATURE:



Application: Provides flexibility and versatility by doubling as both a downlight and as an accent light. This trim has a larger degree of rotation resulting in both visual style and practical ergonomics.


Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 45° degrees vertically.

Label: UL Listed, cETL Listed

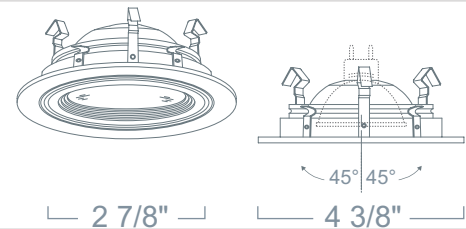

IC HOUSING LH3IC-GU10

120V 50W MR16 GU10

ADJUSTABLE GIMBAL LR1389

120V 50W Max MR16

| RATING | LAMPING |
|-----------------------|-------------------------|
| LH3IC-GU10 :Standard | Blank :50W Incandescent |
| LH3IC-GU10A :Airtight | -LBL12 :12W LED |

| FINISH |
|------------------|
| LR1389W :White |
| LR1389B :Black |
| LR1389C :Chrome |
| LR1389G :Gold |
| LR1389N :Natural |
| LR1389CO :Copper |

Ordering example: LH3IC-GU10A/LR1389N