


## IC Housing w/ Reflector w/ Flat Frosted Lens LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (PAR16/PAR20)

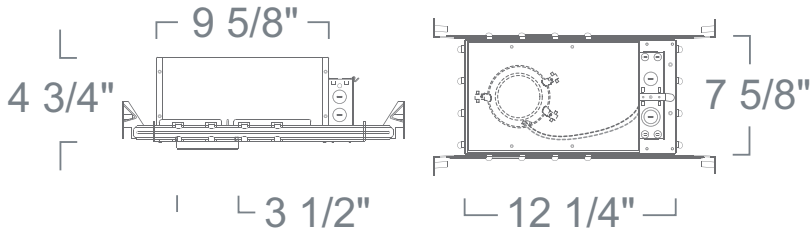

### SPECIFICATION

Ceiling cut-out: 3 7/8"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Insulation Contact:** IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Label: cETL Listed


### FEATURE:



**Application:** A perfect choice to illuminate a shower or bath. With its small aperture and incandescent light source, these trims produce a strong vibrant light that fully illuminates the shower and bath areas without drawing attention to the source.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: cETL Listed

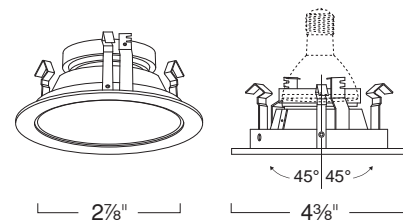

**IC HOUSING**  
**LH3IC** 120V 50W Max PAR20/PAR16 MED E26

**REFLECTOR W/ FLAT FROSTED LENS**  
**LR317** 120V 40W Max PAR20/PAR16

Ordering example: LH3IC/LR317W

#### RATING

LH3IC :Standard  
LH3ICA :Airtight

#### RING FINISH

LR317W :White  
LR317N :Natural  
LR317CO :Copper  
LR317MO :Mocha