


Remodel Housing w/ 3" MR16 Lenses LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (GU10)

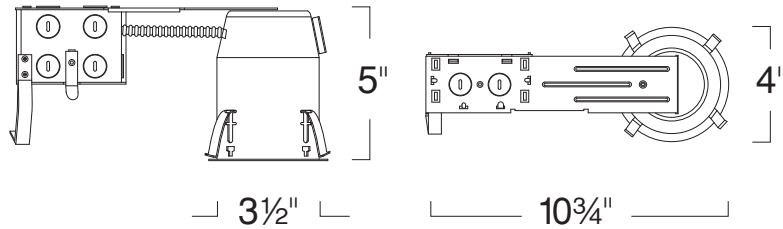

SPECIFICATION

Ceiling cut-out: 3 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:




Application: These attractive glass trims give class and a touch of elegance to a space that requires optimum performance. Fully lensed trims adhere to extremely damp locations, such as saunas and shower stalls. Utilizing a frosted lens can soften the light output.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: UL Listed, cETL Listed

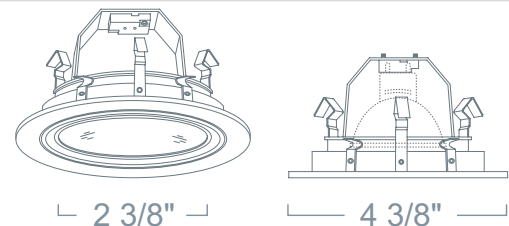

REMODEL HOUSING
LH3RA-GU10 120V 50W Max MR16 GU10

WATTAGE	VOLTAGE
LH3RA-GU10 :50W	Blank :120V

3" MR16 LENSES
LR1342 120V/12V 50W Max MR16, GU5.3

RING FINISH	RATING
LR1342W-01 :White	Blank :Damp Location
LR1342B-01 :Black	-WL :Wet Location

Ordering example: LH3RA-GU10/LR1342W-01