


Remodel Housing w/ Reflector w/ Flat Frosted Lens LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (PAR16/PAR20)

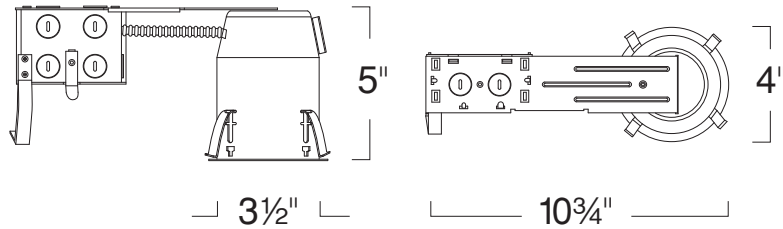

SPECIFICATION

Ceiling cut-out: 3 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed


FEATURE:



Application: A perfect choice to illuminate a shower or bath. With its small aperture and incandescent light source, these trims produce a strong vibrant light that fully illuminates the shower and bath areas without drawing attention to the source.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: cETL Listed

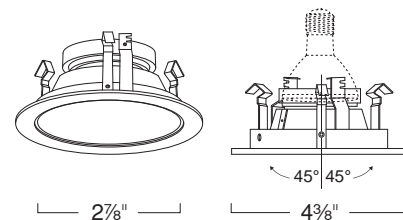

REMODEL HOUSING
LH3R 120V 50W Max PAR20/PAR16 MED E26

REFLECTOR W/ FLAT FROSTED LENS
LR317 120V 40W Max PAR20/PAR16

Ordering example: LH3R/LR317W

RATING

LH3R :Standard
LH3RA :Airtight

RING FINISH

LR317W :White
LR317N :Natural
LR317CO :Copper
LR317MO :Mocha