


Standard Housing w/ Reflector w/ Flat Frosted Lens LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (PAR16/PAR20)

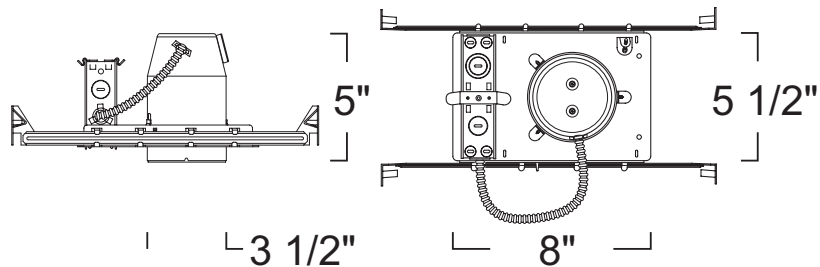

SPECIFICATION

Ceiling cut-out: 3 7/8"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed


FEATURE:



Application: A perfect choice to illuminate a shower or bath. With its small aperture and incandescent light source, these trims produce a strong vibrant light that fully illuminates the shower and bath areas without drawing attention to the source.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: cETL Listed

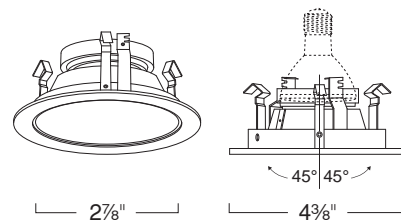

STANDARD HOUSING LH3 120V 50W Max PAR20/PAR16 MED E26

REFLECTOR W/ FLAT FROSTED LENS LR317 120V 40W Max PAR20/PAR16

Ordering example: LH3/LR317W

RATING

- LH3 :Standard
- LH3A :Airtight

RING FINISH

- LR317W :White
- LR317N :Natural
- LR317CO :Copper
- LR317MO :Mocha