


Remodel Housing 120V/277V w/ Adjustable Reflector LH7LV SERIES - 6" LOW VOLTAGE RECESSED LIGHTING

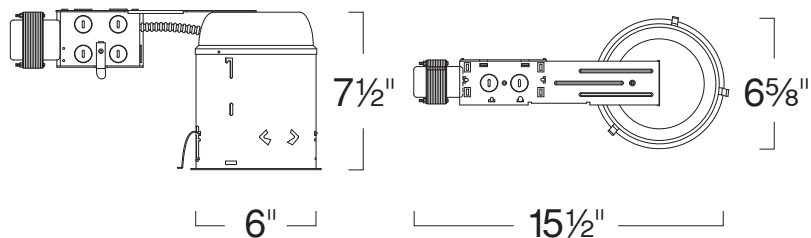

SPECIFICATION

Ceiling cut-out: 6 1/4"

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Transformer: Class H insulated magnetic transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:




Application: Downlights are great for basic area lighting of a room or space accommodating the type of lighting to enhance its mood and decor. Baffle downlights are used to minimize unwanted glare from the lamp source.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be titled 45° degrees vertically.

Accessories: Takes (1) 2" Media.

Label: cETL Listed

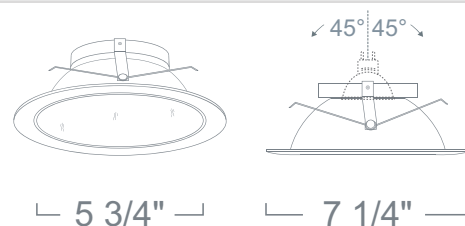

REMODEL HOUSING 120V/277V LH7RLV 12V 75W Max MR16 GU5.3

RATING	WATTAGE	VOLTAGE
LH7RLV :Standard	Blank :50W	Blank :120V/12V
	-75 :75W	-27 :277V/12V (Electronic*)

* Available with 120V/277V Magnetic Option, consult factory.

ADJUSTABLE REFLECTOR LR2616 12V 75W Max MR16

REFLECTOR FINISH	RING FINISH
LR2616W :White	Blank :White
LR2616B :Black	B :Black
LR2616C :Clear	C :Chrome
LR2616G :Gold	G :Gold
LR2616CO :All Copper*	N :Natural
LR2616S :Satin Haze	CO :Copper
LR2616CH :Champagne	

* Comes standard with a matching ring finish. Use "W" for White Ring.

Ordering example: LH7RLV/LR2616W