


## Remodel Architectural Housing w/ Reflector w/ Glass Ring LH800 SERIES - 8" ARCHITECTURAL INCANDESCENT RECESSED LIGHTING

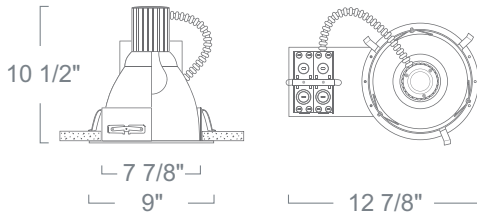

### SPECIFICATION

*Ceiling cut-out: 8"*

**Application:** Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

**Housing Frame:** 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing. Pre-installed torsion remodeling clips for secure installation on existing ceiling.

**Mounting:** Housing suitable for existing or new construction installations, supplied with 4 high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling up to 1" thick for fast and easy installation from below the ceiling line.

**Socket Cap:** Extruded aluminum socket cap, 1 1/4" vertically adjustable socket arm with set screw which enables the use of multiple lamp types and repositioning to optimize lamp performance. Furnished with heat sink fins to vent lamp heat and extend lamp life. Accepts compatible reflector trims.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Junction Box:** 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

**Insulation Contact:** Non-IC rated housing must be kept 3" from insulation.

**Safety Labels:** UL/CUL listed for through-branch wiring (16) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

**Assembled in USA**

### FEATURE:




**Application:** Architectural-grade recessed downlight reflector for high ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Decorative glass accent brings style and elegance to any decor. Reduces lamp image while adding a subtle decorative element to architecture.

**Mounting:** Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

**Label:** UL Listed, cETL Listed

**Assembled in USA**

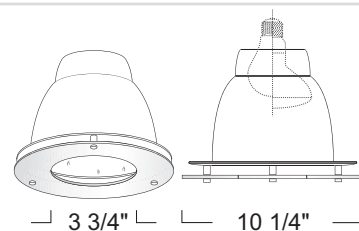

### REMODEL ARCHITECTURAL HOUSING LH800R 120V 200W MAX PAR38/ A19/ A21 MED E26

WATTAGE	OPTIONS
LH800R :250W	Blank :None -FS :Fuse

### REFLECTOR W/ GLASS RING LR8071 120V 250W Max PAR38/ A19/ A21

REFLECTOR / FLANGE FINISH	GLASS
LR8071CCF :Clear Reflector/Clear Flange	-BL :Blue
LR8071CNF :Clear Reflector/Natural Flange	-FR :Frosted
LR8071CWF :Clear Reflector/White Flange	
LR8071SSF :Satin Haze Reflector/Satin Haze Flange	
LR8071WWF :White Reflector/White Flange	

**Ordering example:** LH800R-FS/LR8071CNF-BL