


LHABLD8 - 8" LUMENBLAST

OPEN & LENSED DOWNLIGHTS, ROUND, 1000LM - 10,000LM

- Illuminate up to 100' ceilings
- Four trim finishes
- Low glare design
- Highly efficient COB (Chip on Board) LED

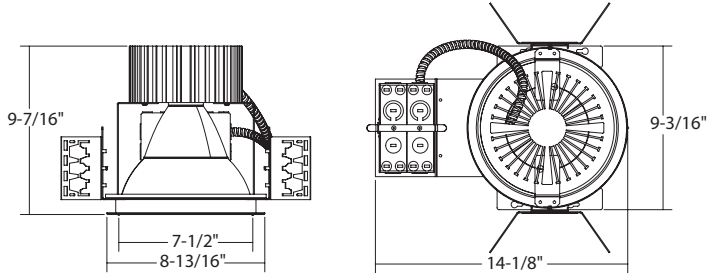

Ceiling Cut-out: 8" Dia.
Maximum Ceiling Thickness: 1"



LHABLD8

ORDERING – Example: LHABLD820C050UE-DUN-B40-T27-C90-FS/LRB81S

LHABLD8

Fixture Lumens Dimming Beam Spread Color Temperature Frame Options / Trim



Fixture	Lumens	Dimming	Beam Spread	Color Temperature	Frame Options	Trim
Downlight	LHABLD8					
Lumens (Nominal Delivered)						
1000lm (9W)	12C025	Non-Dimming	15° Narrow Spot	-B15	None	Blank
1500lm (13W)	15C035	Remote Driver	20° Spot	-B20	Generator Transfer Device	-GTD
2500lm (19W)	20C050	UniDim™ 0-10V ELV Triac Dimming (5%)	40° Flood	-B40	Single Fuse	-FS
3500lm (28W)	35C070		70° Very Wide Flood	-B70	Remote Emergency Backup (12W)	-EM
5000lm (41W)	45C105	Wireless Enocean Adapter (10%)	Color Temperature		Remote Emergency Inverter (up to 28W)	-EMAC⁷
6000lm (51W)	50C085	DMX Dimming (0%)	2700K, 80 CRI	-T27	C-Channel Hanger Bar Set	C260
7000lm (64W)	60C105⁸	0-10V Dimming (1%)	2700K, 97 CRI	-T27-C97	Adjustable C-Channel Hanger Bar Set	C260-J
8000lm (72W)	70C125	347V 0-10V Dimming (5%)	3000K, 80 CRI	-T30	Trim (Open)	
10,000lm (116W)	120C200	Lutron Hilume/ Ecosystem Dimming (1%)	3000K, 97 CRI	-T30-C97	All White	LRB81W
		120V 2-Wire Incandescent (1%)	3500K, 80 CRI	-T35	All Black	LRB81B
			4000K, 80 CRI	-T40	All Satin Haze	LRB81S
			Warm dimming 1850K-3000K	-TWD⁵	Satin Haze/White	LRB81SW
			Tunable White 2700K-6500K	-TTW⁶	Clear/White	LRB81CW
					Specular Clear	LRB81C
					Trim (Frosted Lens)	
					All White	LRB82W
					All Black	LRB82B
					All Satin Haze	LRB82S
					Satin Haze/White	LRB82SW
					Clear/White	LRB82CW
					Specular Clear	LRB82C

¹ All drivers are 120V/277V unless otherwise noted.

² DMX Dimming to 0% except for 8000lm & 10,000lm with DMX Dimming to 10%.

³ Not available for 8000lm & 10,000lm.

⁴ Not available for 1000lm - 3500lm.

⁵ Warm Dimming Only available for 1000lm & 1500lm options.

⁶ Tunable White only available with 0-10V signal via "UE-D10P1" option or DMX signal via "UE-DMX" option.

⁷ EMAC emergency option fully illuminates during power failure. Only available for 9W, 13W, 19W and 28W options.

⁸ Not compatible to UE-DUN Driver.

OPTIONS

/C260

C-Channel Hanger Bar Set



/C260-J

Adjustable C-Channel Hanger Bar Set





LHABLD8 - 8" LUMENBLAST

OPEN & LENSED DOWNLIGHTS, ROUND, 1000LM - 10,000LM

SPECIFICATION

Applications

The 8" LumenBlast housing is designed for medium to high ceiling heights and is available as a fixed downlight. With four trim options and four trim finishes, the luminaire offers the versatility and high lumen output that is ideal for classrooms, office lobbies and retail applications.

Housing Frame

16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceilings up to 1" thick.

Mounting

Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT. 26"C Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

Optics

LED Light Engine - COB (Chip on Board) LED is replaceable via quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Beam Spread - Available in 15° Narrow Spot (B15), 20° Spot (B20), 40° Flood (B40), and 70° Very Wide Flood (B70).

Color Temperature - Comes standard with 3000K Warm White LEDs binned to 3-step MacAdam ellipses within the ANSI C78 377A standard for color temperature and chromaticity ranges light binning allowance. Also available in 2700K, 3500K and 4000K.

Color Rendering Index - Comes standard with 80 CRI. 90 CRI and 97 CRI (C97) option also available with 2700K and 3000K.

Warm Dimming - Optional from 1850K to 3500K.

Tunable White - Optional with correlated color temperature range from 2700K to 5500K.

Lumen Maintenance - Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management

Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Trims

Open trims are available in all White (LRB81W), all Black (LRB81B), all Satin Haze (LRB81B), and Satin Haze/White (LRB81SW). Frosted lens trims are available in all White (LRB82W), all Black (LRB82B), all Satin Haze (LRB82B), and Satin Haze/White (LRB82SW).

Certifications and Listings

ETL/cETL listed to UL1598 and UL8750. Suitable for dry and damp locations.

Caution

Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Warranty

Covered by an 5 years warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C. Installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.