


Housing w/ PAR20 Pull Down LHBD6 SERIES - 6" INCANDESCENT ADJUSTABLE RECESSED LIGHTING

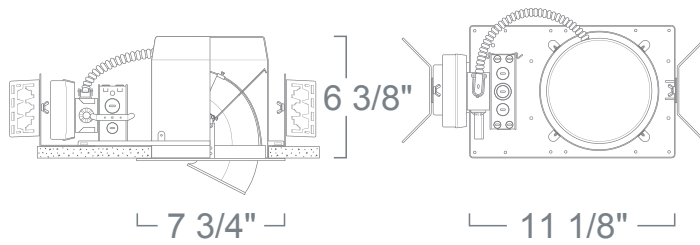

SPECIFICATION

Ceiling cut-out: 6 3/8"

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Mounting: Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT, 26" C-Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

Socket Cap: Extruded aluminum socket cap, 1 1/4" vertically adjustable socket arm with set screw which enables the use of multiple lamp types and repositioning to optimize lamp performance. Furnished with heat sink fins to vent lamp heat and extend lamp life. Accepts compatible reflector trims.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed

Assembled in USA

FEATURE:



Application: Architectural-grade adjustable recessed trim for commercial and architectural installations with the need to accent objects and illuminate walls to enhance the mood in a room and give a more spacious and dramatic feel. Made of heavy duty die cast construction for rigid and dependable aiming.

Mounting: Trim held in place with two stainless steel chicken-wing springs for a tight comfortable fit and easy access to housing for lamp and electrical maintenance.


Socket: Standard porcelain medium screw base socket with high temperature leads.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Adjustability Lamp can be tilted 50° degrees vertically.

Label: cETL Listed

Assembled in USA

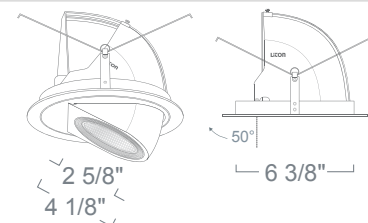

HOUSING
LHBD600 120V 75W MED E26

WATTAGE	OPTION
LHBD600 :Standard	Blank :None
	/C260 : (2) 26" C- Channel Hanger Bars
	/C260-J : 26" Adjustable C- Channel

PAR20 PULL DOWN
LR6767 120V 50W PAR20

FINISH
LR6767W :Powder Coat White

Ordering example: LHBD600/LR6767W

2020.07.28

File Located online www.liton.com/spec

ID #: 544_545