



LHFRLD26 : 2.5" GEN2 P-SERIES FIRE-RATED NEW CONSTRUCTION FRAME ROUND/SQUARE

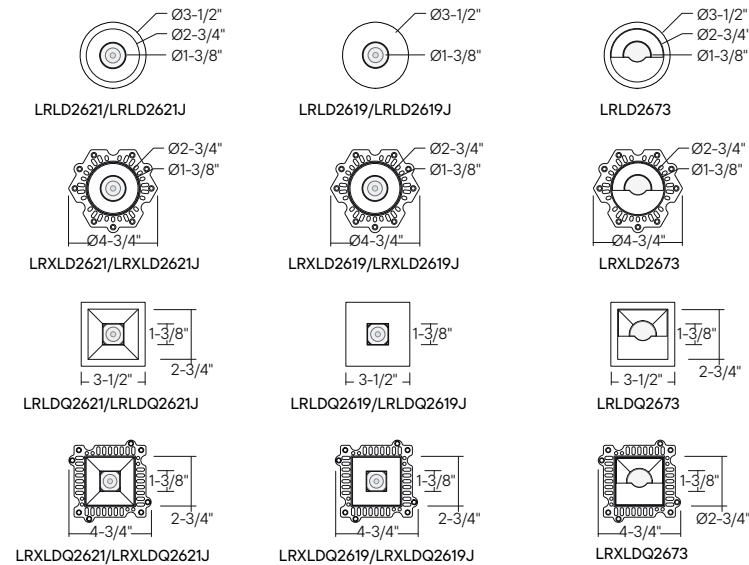

- Patented 3-stage fire-resistant technology
- One-hour fire rating
- New construction frame
- Eliminates manually constructed drywall enclosures saving labor, materials and time
- IC Rated and airtight

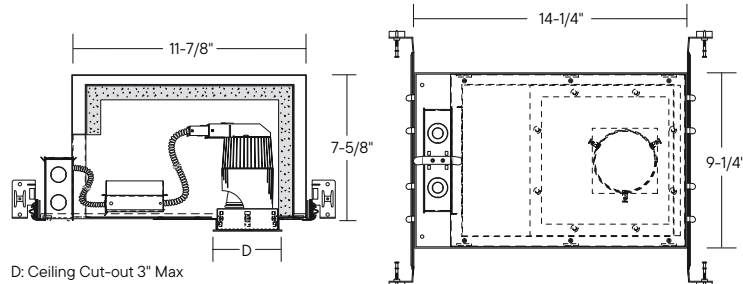

ORDERING : /LHFRLD26

/LHFRLD26

Housing

Housing*

2.5" Fire-Rated /LHFRLD26
 Housing

2025.11.13

*Type IC Frame and Fire-Rated Frame only compatible with LD5INTJBX with -CO20-HO (600lm, 8W)

SPECIFICATION

COMPATIBILITY

**LRLD2621/
LRXLD2621**

2.5" Gen 2 P-Series
Round Flanged or Trimless
Downlight
1,000lm - 2,400lm
(15 - 22W)

**LRLD2621J/
LRXLD2621J**

2.5" Gen 2 P-Series
Round Flanged or Trimless
Adjustable Downlight
1,000lm - 2,400lm
(15 - 22W)

**LRLD2619/
LRXLD2619**

2.5" Gen 2 P-Series
Round Flanged or Trimless
Downlight Pinhole
1,000lm - 2,400lm
(15 - 22W)

**LRLD2619J/
LRXLD2619J**

2.5" Gen 2 P-Series
Round Flanged or Trimless
Adjustable Pinhole
1,000lm - 2,400lm
(15 - 22W)

**LRLD2673/
LRXLD2673**

2.5" Gen 2 P-Series
Round Flanged or Trimless
Wall Wash
1,000lm - 2,400lm
(15 - 22W)

**LRLDQ2621/
LRXLDQ2621**

2.5" Gen 2 P-Series
Square Flanged or Trimless
Downlight
1,000lm - 2,400lm
(15 - 22W)

**LRLDQ2621J/
LRXLDQ2621J**

2.5" Gen 2 P-Series
Square Flanged or Trimless
Adjustable Downlight
1,000lm - 2,400lm
(15 - 22W)

**LRLDQ2619/
LRXLDQ2619**

2.5" Gen 2 P-Series
Square Flanged or Trimless
Downlight Pinhole
1,000lm - 2,400lm
(15 - 22W)

**LRLDQ2619J/
LRXLDQ2619J**

2.5" Gen 2 P-Series
Square Flanged or Trimless
Adjustable Pinhole
1,000lm - 2,400lm
(15 - 22W)

**LRLDQ2673/
LRXLDQ2673**

2.5" Gen 2 P-Series
Square Flanged or Trimless
Wall Wash
1,000lm - 2,400lm
(15 - 22W)

Application

Fire-rated frames are easy to install and lower costs by eliminating the need for costly contractor constructed drywall boxes which are inconsistent in build and protection and are often rejected by inspectors.

Mounting

Housing suitable for new construction installations. Adjusts up to 3/4" ceiling thickness. Supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Trim is secured via positive retention friction clips.

Insulation Contact

IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation.

Fire Rating

Stops the progress of an active fire. Meets the fire-stop capabilities of a typical 5/8" gypsum board (drywall) barrier. Eliminates the requirement to specify more expensive fire-rated materials or the use of manually constructed drywall enclosures. Patented dual-layer housing is constructed of 20-gauge aluminum designed to maintain the continuity of fire-rated ceiling assemblies, subject to UL classified L500 series fire rated assemblies rated for 1 hour.

Certifications and Listing

UL Certifications and Approvals for One-Hour Fire Rating: UL263, CAN/ULC S101-07, ASTM E119-00A, UBC7-1, NFPA 251 an ASI A2.1 under U.S. Patent.