
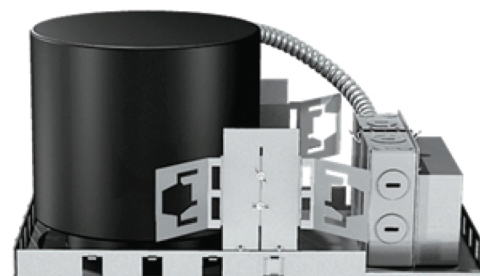


LHJLD4 - 3.5" 19W MINI-ARC LED HOUSING

3.5" 19W MINI-ARC LED

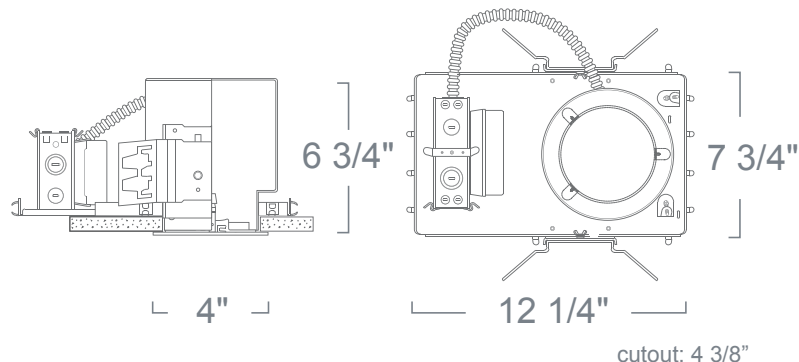

SPECIFICATION

19W Max LED

Application: High-output architectural-grade miniature recessed LED downlight housing for low to medium height ceilings in commercial and architectural applications. Spacious housing allows generous adjustment of the trim. A variety of trims, styles and finishes are available to achieve desired decor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT, 26" C-Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

Driver: Electronic Direct Current LED driver integrally mounted in electric junction box.

Power Connection: LED lamp array is replaceable via on board quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Dimming: 0-10V dimming option (-D10) works with most 0-10V dimmers. Factory qualified for use with Leviton IP710-DLX and Lutron NTFTV-WH. The Lutron Hi-Lume 1% dimming option (-DHL) works with compatible Lutron dimmers: NovaT NTF-10-277, Skylark SF-12P277 & Vierti VTF-6A. **Uni-Dim™** is a universal dimming system that works with most ELV, Incandescent and 0-10V fluorescent dimmers.

Caution: LITON recommends use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.

Emergency: Available in and Emergency (5W).

Label: cETL Listed

COMPATIBILITY

 LR4LH21 3.5" LED 19W REFLECTOR DOWNLIGHT	 LR4LHQ21 3.5" LED 19W SQUARE REFLECTOR DOWNLIGHT	 LR4LH19 3.5" LED 19W ACCENT PINHOLE
 LR4LH71 3.5" LED 19W ADJUSTABLE ACCENT/SLOPED	 LR4LH16 3.5" LED 19W ADJUSTABLE ACCENT PINHOLE	

Note: Wattage limitations on compatible items must be met.

Assembled in USA

Benefit:

- 277V input available
- Emergency Battery Backup Option
- Driver mounted away from LED for cooler operation

FEATURE:



ORDERING EXAMPLE : LHJLD419C70-DIN-EM

LHJLD4	WATTAGE	OPTIONS	EMERGENCY	ACCESSORIES
LHJLD4	19C70 :19W	Blank :120V Non-Dimming -DIN :120V Triac/ELV Dimming UE :120V/277V UE-D10 :120V/277V 0-10V UE-DHL :Hi-Lume Dimming (120V/277V) UE-DUN :120V-277V (ELV/0-10V Universal Dimming)	Blank :None -EM :Emergency (5W)	/C260 :26" C Channel /HB24 :24" Set

ID# : 2719