


## LHLD25-FRM - 2.5" NEW CONSTRUCTION FRAME (ROUND) 2.5" MINI-ARC LED



### SPECIFICATION






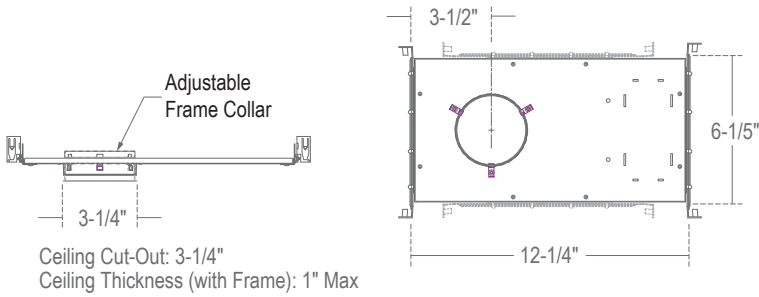








LED

**Application:** Recessed downlight frame height ceilings. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** .05" baked enamel 1-piece drawn steel housing adjusts up to 1" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for new construction and remodel installations, supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

### COMPATIBILITY

 <b>LRLD2521</b> 2.5" RECESSED LED 1000LM/1400LM ROUND DOWNLIGHT	 <b>LRLD2572</b> 2.5" RECESSED LED 1000LM/1400LM ROUND WALL WASH	 <b>LRLD2573</b> 2.5" RECESSED LED 750LM/1200LM ROUND ZERODARK SPOT/W.WASH
 <b>LRXD2521</b> 2.5" RECESSED LED 1000LM/1400LM ROUND TRIMLESS	 <b>LRXD2572</b> 2.5" RECESSED LED 1000LM/1400LM ROUND WALL WASH TRIMLESS	 <b>LRXD2573</b> 2.5" RECESSED LED 750LM/1200LM ROUND ZD SPOT/WW TRIMLESS
 <b>LRLD2521J</b> 2.5" RECESSED LED 1000LM/1400LM ROUND 25° ADJUSTABLE	 <b>LRLD2571</b> 2.5" RECESSED LED 1000LM/1400LM ROUND 40° ADJUSTABLE	 <b>LRLD2567</b> 2.5" RECESSED LED 650LM ROUND PULL DOWN
 <b>LRXD2521J</b> 2.5" RECESSED LED 1000LM/1400LM RD 25° ADJ. TRIMLESS	 <b>LRXD2571</b> 2.5" RECESSED LED 1000LM/1400LM RD 40° ADJ. TRIMLESS	 <b>LRXD2567</b> 2.5" RECESSED LED 650LM ROUND PULL DOWN TRIMLESS
 <b>LRLD2519</b> 2.5" RECESSED LED 600LM/980LM ROUND PINHOLE	 <b>LRLD2524</b> 2.5" RECESSED LED 1100LM/1500LM SHALLOW PINHOLE	

Note: Wattage limitations on compatible items must be met.

2020.07.13