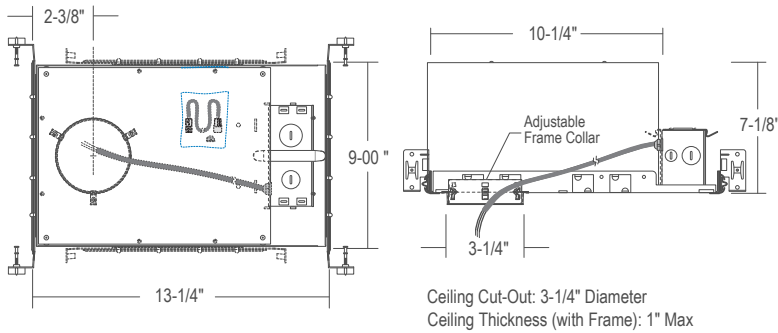


LHLD25IC-FRM - NEW CONSTRUCTION IC FRAME (ROUND) 2.5" MINI-ARC LED



SPECIFICATION

LED












Application: Recessed downlight frame height ceilings. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: .05" baked enamel 1-piece drawn steel housing adjusts up to 1" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction and remodel installations, supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

COMPATIBILITY*

 LRLD2521 2.5" RECESSED LED 1000LM ROUND DOWNLIGHT	 LRLD2572 2.5" RECESSED LED 1000LM ROUND WALL WASH	 LRLD2573 2.5" RECESSED LED 750LM ROUND ZERODARK SPOT/W.WASH
 LRXL2521 2.5" RECESSED LED 1000LM ROUND TRIMLESS	 LRXL2572 2.5" RECESSED LED 1000LM ROUND WALL WASH TRIMLESS	 LRXL2573 2.5" RECESSED LED 750LM ROUND ZD SPOT/WW TRIMLESS
 LRLD2521J 2.5" RECESSED LED 1000LM ROUND 25° ADJUSTABLE	 LRLD2571 2.5" RECESSED LED 1000LM ROUND 40° ADJUSTABLE	 LRLD2519 2.5" RECESSED LED 600LM/980LM ROUND PINHOLE
 LRXL2521J 2.5" RECESSED LED 1000LM RD 25° ADJ. TRIMLESS	 LRXL2571 2.5" RECESSED LED 1000LM RD 40° ADJ. TRIMLESS	

Note: Wattage limitations on compatible items must be met.

*LHLD25IC-FRM is not available with (-L14) 1400lm, (-L24) 2400lm, and (-TWD) Warm Dimming when used with 2.5" Recessed Fixtures.