


LHQLD25-FRM - 2.5" NEW CONSTRUCTION FRAME (SQUARE) 2.5" MINI-ARC LED

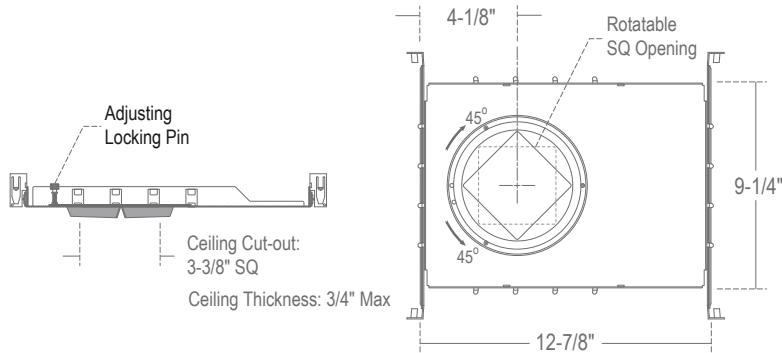

SPECIFICATION

LED

Application: Recessed downlight frame height ceilings. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs. Housing has $\pm 45^\circ$ rotatable square opening for reflector.

Mounting: Housing suitable for new construction and remodel installations, supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Available with an Integral Emergency Switch. Consult Factory

COMPATIBILITY

 LRLDQ2521 2.5" RECESSED LED 1000LM/1400LM SQUARE DOWNLIGHT	 LRLDQ2572 2.5" RECESSED LED 1000LM/1400LM SQUARE WALL WASH	 LRLDQ2573 2.5" RECESSED LED 750LM/1200LM SQUARE ZERODARK SPOT/W.WASH
 LRXLDQ2521 2.5" RECESSED LED 1000LM/1400LM SQUARE TRIMLESS	 LRXLDQ2572 2.5" RECESSED LED 1000LM/1400LM SQUARE WALL WASH TRIMLESS	 LRXLDQ2573 2.5" RECESSED LED 750LM/1200LM SQUARE ZD SPOT/WW TRIMLESS
 LRLDQ2521J 2.5" RECESSED LED 1000LM/1400LM SQUARE 25° ADJUSTABLE	 LRLDQ2571 2.5" RECESSED LED 1000LM/1400LM SQUARE 40° ADJUSTABLE	 LRXLDQ2571 2.5" RECESSED LED 1000LM/1400LM SQ 40° ADJ. TRIMLESS
 LRXLDQ2521J 2.5" RECESSED LED 1000LM/1400LM SQ 25° ADJ. TRIMLESS		

Note: Wattage limitations on compatible items must be met.