


## Remote Housing - No Transformer w/ Micro Eyeball LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

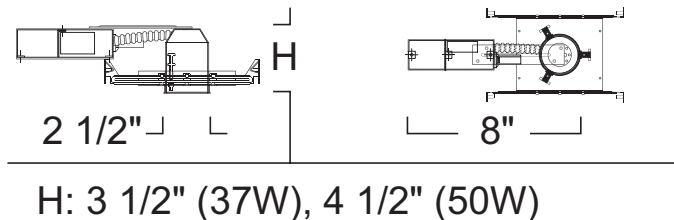

### SPECIFICATION

*Ceiling cut-out: 2 3/4"*

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Remote Transformer:** For use with thermally protected electronic low voltage transformer (not supplied) to be mounted in remote location away from fixture.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Junction Box:** 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non-IC rated housing must be kept 3" from insulation.

**Safety Labels:** ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

### FEATURE:



**Application:** The 2" Micro-Cast accent light is a perfect solution for low-profile design in hard-to-light spaces. They feature an adjustable lamp holder that allows for precise highlighting of desired objects. These low voltage downlight trims are constructed of high quality die-cast aluminum. Available in standard black & white, as well as popular designer finishes of Natural "Raw" Metal, Antique Copper & Mocha.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Adjustability** Lamp can be titled 45° degrees vertically.

**Accessories:** Takes (1) 1 3/8" Media.

**Label:** cETL Listed

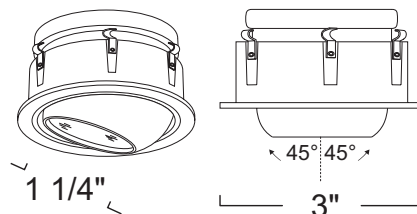

### REMOTE HOUSING - NO TRANSFORMER LHR1299 12V Out 37W Max MR11/MR16

### MICRO EYEBALL LR1218 12V 35W Max MR11

**Ordering example:** LHR1299/LR1218B

#### WATTAGE

LHR1299 :37W  
LHR1299-50 :50W

#### FINISH

LR1218B :All Black Trim  
LR1218N :All Natural Metal Trim  
LR1218CO :All Copper Trim  
LR1218MO :All Mocha Trim