


Remote Housing - No Transformer w/ Micro Slot w/ Black Baffle

LHR1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING



H: 3 1/2" (37W), 4 1/2" (50W)

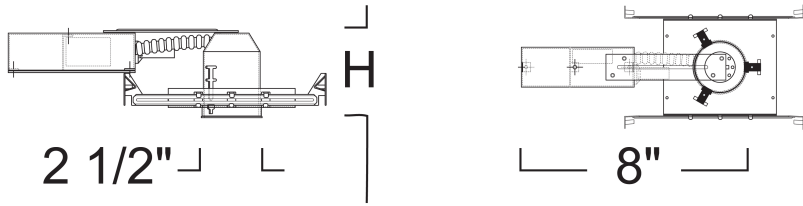

SPECIFICATION

Ceiling cut-out: 2 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Trim is secured with torsion wing springs.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Remote Transformer: For use with thermally protected electronic low voltage transformer (not supplied) to be mounted in remote location away from fixture.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: The 2" Micro-Cast accent light is a perfect solution for low-profile design in hard-to-light spaces. They feature an adjustable lamp holder that allows for precise highlighting of desired objects. These low voltage downlight trims are constructed of high quality die-cast aluminum. Available in standard black & white, as well as popular designer finishes of Natural "Raw" Metal, Antique Copper & Mocha.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 35° degrees vertically.

Accessories: Takes up to (2) 1 3/8 Media.

Label: cETL Listed

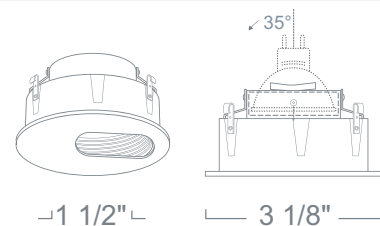

REMOTE HOUSING - NO TRANSFORMER

LHR1299 12V Out 37W Max MR11/MR16

WATTAGE

LHR1299 :37W
LHR1299-50 :50W

MICRO SLOT W/ BLACK BAFFLE

LR1220 12V 37W Max MR11

TRIM FINISH

LR1220W :White
LR1220B :Black
LR1220N :Natural Metal
LR1220CO :Copper
LR1220MO :Mocha

Ordering example: LHR1299/LR1220B