


Remote Housing - No Transformer w/ MR11 Square Trim

LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING

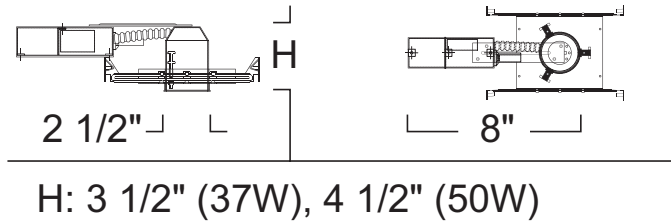

SPECIFICATION

Ceiling cut-out: 2 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 1-1/4" ceiling thickness. Trim is secured with torsion wing springs.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Remote Transformer: For use with thermally protected electronic low voltage transformer (not supplied) to be mounted in remote location away from fixture.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: This miniature low-voltage square trim is ideal for low ceiling heights and hard-to-light residential and light commercial applications. The square in square design fits in well with modern designs.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 35° degrees vertically.

Accessories: Takes (1) 1 3/8" Media.

Label: cETL Listed

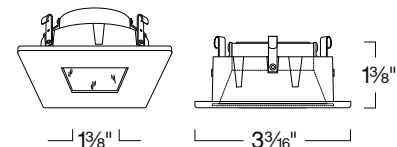

REMOTE HOUSING - NO TRANSFORMER

LHR1299 12V Out 37W Max MR11/MR16

WATTAGE

LHR1299 :37W
LHR1299-50 :50W

MR11 SQUARE TRIM

LRSQ1211 12V 35W Max MR11

FINISH

LRSQ1211W :White Reflector/White Trim
LRSQ1211BW :Black Reflector/White Trim
LRSQ1211SN :Satin Reflector/Natural Trim
LRSQ1211BB :Black Reflector/Black Trim

Ordering example: LHR1299/LRSQ1211W