
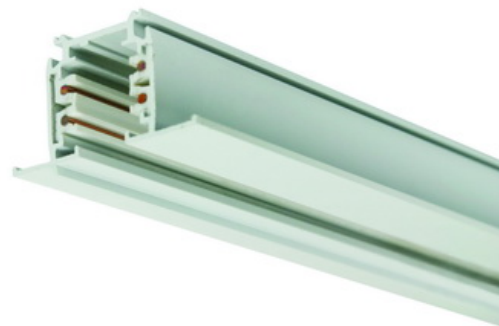


LP20 - RECESSED TRACK

2 CIRCUIT / 2 NEUTRAL TRACK ACCESSORIES

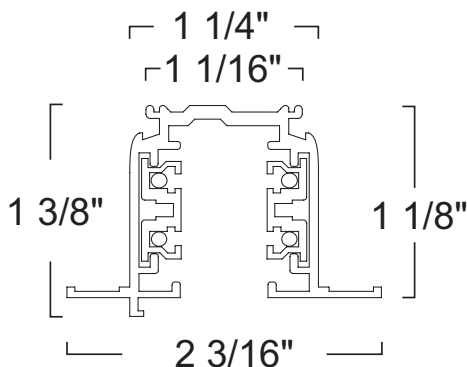

SPECIFICATION

120V/277V

Application: Architectural 20 Amp 2 Circuit / 2 Neutral recessed track is designed to be a durable, dependable, and simple-to-install unobtrusive lighting solution. The track's extruded aluminum construction and continuously crimped conductor ensure mechanical strength and electrical reliability. The integral suspension rail and pre-drilled mounting holes of the track simplify recessed installations, LPC39W external bracket can supplied for suspending track from above the extrusion. This system is ideal for dimming intensive applications. The independent neutrals guarantee that the two circuits are completely isolated. Cross-circuit interference and neutral harmonics are completely eliminated, essential for trouble free dimming. The lack of harmonics ensures superior fixture performance and longer equipment life. Independent neutrals also offer twice the power handling capacity of ordinary common neutral track.
















- Independent Neutrals - enable greater power capacity (2 x20A); Dimming capability-dim on two independent circuits without harmonics or interference on the neutral conductor.
- Oversized Conductors - for higher operating safety and reduced overload potential.
- Secure Bus Bar Insulation - firmly crimped insulation secures both conductors and insulation for the life of product
- Separate Mechanical Suspension Points - provides superior weight bearing capacity; ensures electrical contact integrity and reduces likelihood of arcing.
- Polarity Ridge - takes the guesswork out of connector and track alignment during installation.

Length: Available in 4', 6', 8' and 12'.

Finish: Available in Bright White and Black.

Label: UL Listed

COMPATIBILITY

 LP2946 X-CONNECTOR	 LP2905 T-CONNECTOR	 LP2941 LIVE END (RIGHT)
 LT2816 ARCHLITE 38	 LTD25216 16W 1200 LUMEN SOLO LED (SPOTLIGHT OR WALL WASH)	 LTD28214 14W 1000LM LED CYLINDER (2CCT/2NT)
 LT2810 DIE-CAST TAZER 30	 LP2903 STRAIGHT CONNECTOR	 LP2930 END CAP
 LT2812 DIE-CAST TAZER 38	 LT2815 ARCHLITE 30	 LTD252161 16W 1200 LUMEN SOLO W/ ADJUSTABLE LOUVER (SPOTLIGHT)
 LTD27430 APOLLO 30 - 2900 LUMEN (2CCT/2NT)	 LTD28014 14W CONCEALED LED TRACK HEAD (2CCT/2NT)	 LT2719 VERTICAL GIMBAL

Please see website for more compatible items.

FEATURE:



ORDERING EXAMPLE : LP204RW

LP20	LENGTH	FINISH
LP20	4R :4'	W :Bright White
	6R :6'	B :Black
	8R :8'	
	12R :12'	

ID#: 979