


## LR1203 - CROSS BLADE 2" LOW VOLTAGE DOWNLIGHT DIE-CAST TRIMS

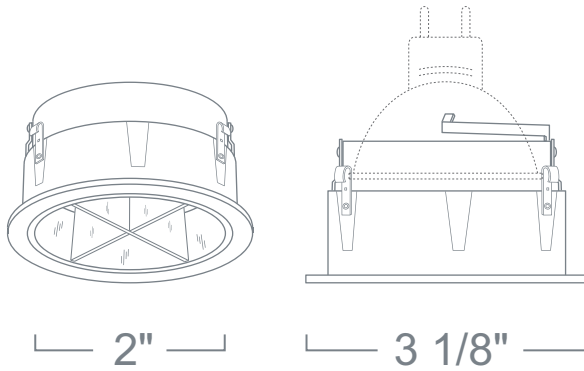

### SPECIFICATION

12V/120V 50W MR16 GU5.3

**Application:** Perfect solution for low-profile design in hard-to-light spaces.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Finish:** Die-Formed Construction Available in All White, Clear Cross Blade/White Ring, All Natural Metal, All Copper and All Mocha.

**Accessories:** Takes up to (3) 2" Media.

**Label:** cETL Listed

### COMPATIBILITY

 <b>LH2R</b> REMODEL	 <b>LH1299IC</b> NEW CONSTRUCTION (IC)	 <b>LH1299R</b> REMODEL
 <b>LHR1299</b> REMOTE HOUSING - NO TRANSFORMER	 <b>LH1299</b> NEW CONSTRUCTION (NON-IC)	 <b>LH2</b> NEW CONSTRUCTION

Note: Wattage limitations on compatible items must be met.

2017.1.12

### FEATURE:



ORDERING EXAMPLE : LR1203CO

LR1203	FINISH	RATING	ACCESSORIES
<b>LR1203</b>	<b>W</b> :All White	<b>Blank</b> :Damp Location	<b>/L38</b> :Clear Lens
	<b>C</b> :Clear Cross Blade/White Ring	<b>-WL</b> :Wet Location	<b>/L40</b> :Yellow Lens
	<b>N</b> :All Natural Metal		<b>/L41</b> :Blue Lens
	<b>CO</b> :All Copper		<b>/L42</b> :Amber Lens
	<b>MO</b> :All Mocha		<b>/L43</b> :Green Lens
			<b>/L44</b> :Daylight Blue Lens
			<b>/L48</b> :Lens with Internal Louver Filter
			<b>/L49</b> :Frosted Soft Focus
			<b>/L50UV</b> :UltraViolet Filter
			<b>/L53</b> :Micro - Prismatic Spread Lens
			<b>/L55</b> :Linear Spread Lens
			<b>/LL16B</b> :Black
			<b>/LL16C</b> :Clear

ID#: 1143