



LR1393 - BAFFLE 3" LOW VOLTAGE TRIMS

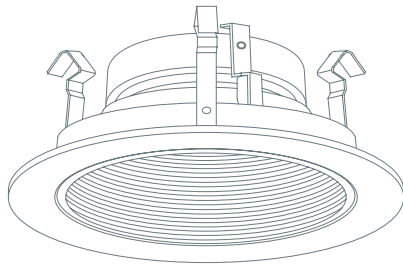

2 7/8"



4 3/8"



SPECIFICATION

12V/120V 50W MR16

Application: Used for both general and accent lighting with excellent results. Allows for the precision lighting of miniature lamps in small areas such as niches and casework. This produces an environment with powerful illumination, yet without drawing attention to its source.







Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White Baffle/ White Ring, All Black, Black Baffle/ White Ring, All Natural * and All Copper.

COMPATIBILITY

 LH1399 STANDARD HOUSING	 LH1399IC IC DOUBLE WALL HOUSING	 LH1399R REMODEL HOUSING
 LH3A-GU10 STANDARD HOUSING	 LH3IC-GU10 IC HOUSING	 LH3RA-GU10 REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

2016.9.13

FEATURE:



ORDERING EXAMPLE : LR1393BB

LR1393	FINISH	ACCESSORIES
LR1393	W :White Baffle/ White Ring	/L38 :Clear Lens
	B :Black Baffle/ White Ring	/L40 :Yellow Lens
	BB :All Black	/L41 :Blue Lens
	N :All Natural *	/L42 :Amber Lens
	CO :All Copper	/L43 :Green Lens
		/L44 :Daylight Blue Lens
		/L48 :Lens with Internal Louver Filter
		/L49 :Frosted Soft Focus
		/L50UV :UltraViolet Filter
		/L53 :Micro - Prismatic Spread Lens
		/L55 :Linear Spread Lens
		/LL16B :Black
		/LL16C :Clear

* Available for New Construction only.

ID# : 279