


## LR1468 - MULTI ACCESSORY PULL DOWN 4" LOW VOLTAGE TRIMS

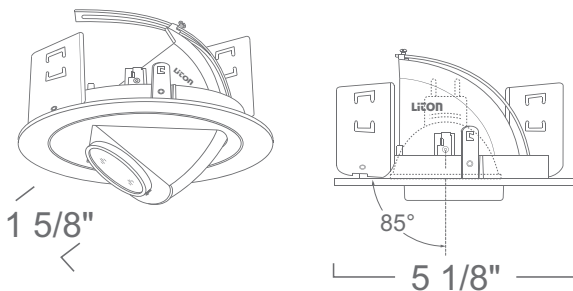

Accepts up to 3 Accessories

### SPECIFICATION

12V 75W Max MR16 GU5.3

**Application:** The elbow design allows for full horizontal and vertical adjustability. With the lamp enclosed in the trim, annoying glares from back and sides of the trim are eliminated to provide visual comfort. Additional options are available that provide glare and optic control.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.







**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Finish:** Deep-Drawn Aluminum Construction Available in White, Black and Natural.



### COMPATIBILITY

 <a href="#">LH1499</a> <b>STANDARD HOUSING</b>	 <a href="#">LH1499IC</a> <b>IC DOUBLE WALL HOUSING</b>	 <a href="#">LSH1499R</a> <b>SHALLOW REMODEL HOUSING</b>
 <a href="#">LH1499R</a> <b>REMODEL HOUSING 120V/277V</b>	 <a href="#">LSH1499IC</a> <b>SHALLOW IC HOUSING</b>	 <a href="#">LSH1499</a> <b>SHALLOW HOUSING</b>

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LR1468W

LR1468	FINISH	ACCESSORIES
LR1468	<b>W</b> :White	<b>/L38</b> :Clear Lens
	<b>B</b> :Black	<b>/L40</b> :Yellow Lens
	<b>N</b> :Natural	<b>/L41</b> :Blue Lens
		<b>/L42</b> :Amber Lens
		<b>/L43</b> :Green Lens
		<b>/L44</b> :Daylight Blue Lens
		<b>/L48</b> :Lens with Internal Louver Filter
		<b>/L49</b> :Frosted Soft Focus
		<b>/L50UV</b> :UltraViolet Filter
		<b>/L53</b> :Micro - Prismatic Spread Lens
		<b>/L55</b> :Linear Spread Lens
		<b>/LL16B</b> :Black
		<b>/LL16C</b> :Clear

ID#: 236